Form R 1931
Superceding Form R-1856

POWER TO SPARE

10th Straight Year of
Network TV... PRESELLS!

1964 EVEREADY® BATTERIES

Complete Line Catalog and Reference Guide

Includes:

- Complete Line Specifications
- Comparative Stock Numbers
- Battery Replacement Guide
- Suggested Retail Prices
- Illustrated Catalog



UNION CARBIDE

ALKALINE BATTERIES

- Maintain peak power much longer
- Up to 10 times more service compared with carbon-zinc batteries
- Provide lowest operating costs in high drain applications
- Outstanding service over wide temperature range

E90
Size "N"
1½ Volts
.35

E91
Size "AA"
1½ Volts
.50

E92
Size "AAA"
1½ Volts
.45

E93
Size "C"
1½ Volts
.60

E94
Size "½ D"
1½ Volts
for Special
Applications
.50

E95
Size "D"
1½ Volts
.75

E177
9 Volts
1.85

523
4½ Volts
1.75

531
4½ Volts
1.25

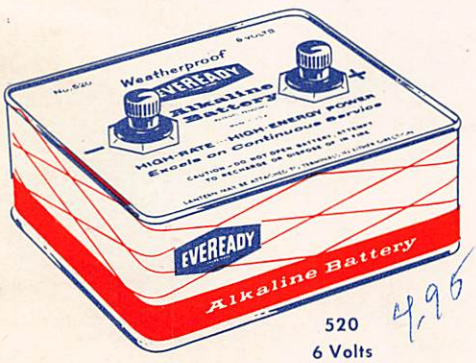

520
6 Volts
4.95

See complete line specifications for types not illustrated.

Especially engineered to provide distortion-free tonal quality plus meeting the long-life power requirements of transistor radios

TRANSISTOR BATTERIES

The 9 Fastest Selling Types!

.25

1015
Size "AA"
1½ Volts

NEW IMPROVED

.69

216
9 Volts

.75

206
9 Volts

.89

226
9 Volts

.25

1035
(Formerly 635)
Size "C"
1½ Volts

.25

A 100
Size "D"
1½ Volts

.89

333
4½ Volts

1.75

266
9 Volts

1.85

246
9 Volts

See complete line specifications for types not illustrated.

RECHARGEABLE BATTERIES

Nickel-Cadmium Secondary Alkaline

for Portable Television, Power Tools, Electronic Applications

1007
Power Pack
10 Volts

8.05

N57
Size "D"
1.25 Volts

N53
1.25 Volts

4.15

563
4½ Volts

1.20

N32
1.25 Volts

2.50

N38
1.25 Volts

3.00

N45
1.25 Volts

10.15



N74
1.25 Volts

MERCURY ENERGIZERS

for Radio, Electronic, Industrial Applications

- Sustained voltage
- Long service life
- Low impedance

1.50

.75

E9
1.4 Volts

1.50

E133
4.2 Volts



E146
8.4 Volts

.65

E1
1.4 Volts

1.75

E164
5.6 Volts

.35

E400
1.4 Volts

.50

E401
1.4 Volts

.50

E640
1.4 Volts

.50

E625
1.4 Volts

.40

E675
1.4 Volts

See complete line specifications for types not illustrated.

RADIO and ELECTRONIC BATTERIES

Portable "A" Batteries

717
7½ Volts

964
1½ Volts

"A-B" Batteries and Farm Packs

759
1½, 90 Volts

Portable "B" "Mini-Max" Batteries

412
22½ Volts

467
67½ Volts

SPECIAL PURPOSE and INDUSTRIAL BATTERIES

"Columbia" No. 6 "Gray Label" Telephone Cell . . . 1½ Volts. Equipped with Fahnestock clips unless screw terminals are specified. No. 6 R.R. and Industrial type available with screw terminals unless Fahnestock clips are specified.

W-350
22½, 45 Volts

W-353
1½ Volts

W-363F
22½, 45 Volts

See complete line specifications for types not illustrated.

FLASHLIGHT BATTERIES

for flashlights, toys, games, etc.

904
Size "N"
1½ Volts

912
Size "AAA"
1½ Volts

915*
Size "AA"
1½ Volts

935*
Size "C"
1½ Volts

950*
Size "D"
1½ Volts

D-99*
Size "D"
Heavy Duty
1½ Volts

*Leakproof Guarantee Shown on Label.

LANTERN BATTERIES

509 (6 Volts) Spring
510S (6 Volts) Screw
510F (6 Volts) Fahnestock

731
6 Volts

732
12 Volts

"HOT SHOT" BATTERIES

1461 (6 Volts)
1462 (6 Volts)
1562 (7½ Volts)
1662 (9 Volts)

1463
12 Volts

EMERGENCY LIGHTING BATTERIES

715 (7½ Volts)
706 (6 Volts)

716
9 Volts

See complete line specifications for types not illustrated.

For Flash-Guns, Automatic Cameras, Electronic Flash Units,

- High peak current
- Long service life

PHOTOFLASH BATTERIES

(Also check ALKALINE BATTERIES)

.20

812
Size "AAA"
1½ Volts

.25

815*
Size "AA"
1½ Volts

.25

835*
Size "C"
1½ Volts

.25

850*
Size "D"
1½ Volts

*Leakproof Guarantee Shown on Label.

Polaroid wink light

2.50

460K
Replacement Kit

Electronic Flash

15.95

497
510 Volts

489 (225 Volts)
491 (240 Volts)
492 (225 Volts)

1.15

B-C Types

504
15 Volts

1.50

505
22½ Volts

HOBBY BATTERIES

For Ignition, Radio Control, Models, Toys and Games

(Also check Alkaline, "Mini-Max," Flashlight, Portable "B" and Nickel-Cadmium Types)

1.25

No. 6 Dry Cell
1½ Volts
(Equipped with screw terminals unless Fahnestock clips are specified)

New

1.15

711
Hobby
"IGNITOR"
1½ Volts

1.25

735
General Purpose
1½ Volts

1.10

E97S
Size "G"
1½ Volts
for GLO-PLUG IGNITION

See complete line specifications for types not illustrated.

SELL THE RIGHT BATTERY for SPECIFIC PORTABLE POWER NEEDS!

No. E91 "AA"
No. E92 "AAA"
No. E93 "C"
No. E95 "D"

"EVEREADY" ALKALINE BATTERIES

A high rate primary electrical energy source. The alkaline-manganese system provides... longer service life... peak performance at high drains... lowest cost per hour in heavy and/or continuous drain applications... ideal for toys, tape recorders, electronic devices.

No. 912 "AAA"
No. 915 "AA"
No. 935 "C"
No. 950 "D"

"EVEREADY" STANDARD FLASHLIGHT BATTERIES

Low initial cost — ideal for all general purpose uses.

No. 1015 "AA"
No. 1035 "C"
(formerly 635)
No. A100 "D"

"EVEREADY" RADIO AND ELECTRONIC BATTERIES

Especially engineered to provide distortion-free tonal quality plus meeting the long-life power requirements of transistor radios and other electronic devices.

No. 812 "AAA"
No. 815 "AA"
No. 835 "C"
No. 850 "D"

"EVEREADY" PHOTOFLASH BATTERIES

Specifically formulated to provide high peak current... proper synchronization... maximum service and shelf life necessary to power automatic cameras and flash devices.

No. N46 "AA"
No. N54 "C"
No. N57 "D"

"EVEREADY" SEALED NICKEL-CADMIUM RECHARGEABLE BATTERIES

True storage (secondary) batteries. They can be recharged many times to give long, useful life and are not adversely affected by long storage, either charged or discharged.

No. E9 "AA"
No. E42 "D"

"EVEREADY" MERCURY BATTERIES

An efficient primary electrical energy source. This system provides sustained voltage under load... low internal impedance... long service and shelf life under varying conditions.

(II) COMPLETE LINE SPECIFICATIONS

"Eveready" Battery Number	NEDA Number	Overall Dimensions in Inches L W H	Terminals & Voltages	Battery Weight lbs.	Battery Weight ozs.	Unit Pkg. Quan.	List Price Each	Major Use
E1	1100	0.625 Diam. x 0.650	Flat Contacts—, +1.40		0.43	4	$ 0.65	Meters, Instruments, Signal Lights, Miniature Radios
E1N		0.625 Diam. x 0.650	Flat Contacts—, +1.35		0.43	4	0.80	
E3		0.985 Diam. x 0.660	Flat Contacts—, +1.35		0.93	4	1.05	
E4		1.195 Diam. x 0.660	Flat Contacts—, +1.35		1.6	4	1.35	
EPX-4		0.662 Diam. x 1.965	Flat Contacts—, +5.40		1.16	1	1.95	Camera
No. 6 "Ignitor" Gen. Purpose	905 914	2-5/8 Diam. x 6-5/8	**Screw—, +1.5	2	2	1	1.25	Ignition, Lighting
No. 6 "Gray Label" Telephone	906	2-5/8 Diam. x 6-5/8	***Fahnestock—, +1.5	2	2	1	1.25	Telephone
No. 6 Railroad & Industrial	911	2-5/8 Diam. x 6-5/8	**Screw—, +1.5	2	2	1	1.35	Ignition, Telephone
EPX-6		0.662 Diam. x 4.090	Flat Contacts—, +5.40, +12.15		1.6	1	3.95	Camera
E9	1103	0.550 Diam. x 1.968	Flat Contacts—, +1.40		1.05	4	0.75	Transistor Applications
E9N		0.550 Diam. x 1.968	Flat Contacts—, +1.40		1.05	2	0.85	Transistor Radio
E12	1101	0.640 Diam. x 1.968	Flat Contacts—, +1.40		1.4	2	1.15	Instruments, Miscellaneous
E12N		0.640 Diam. x 1.968	Flat Contacts—, +1.35		1.4	2	1.25	Meters, Instruments
EPX-13		0.610 x .233	Flat Contacts—, +1.35		0.15	4	0.50	Camera
EPX-14		0.655 x .614	Flat Contacts—, +2.7		0.3	1	1.10	Camera
N22		0.449 Diam. x 0.201	Flat Contacts—, +1.25		0.04	1	1.50	Instruments, Hobby, Transistor Applications, Miscellaneous
N24		0.610 Diam. x 0.235	Flat Contacts—, +1.25		0.12	1	1.00	
N26		0.988 Diam. x 0.230	Flat Contacts—, +1.25		0.32	1	1.10	
N26T		0.988 Diam. x 0.230 (plus tabs)	Solder Tabs—, +1.25		0.32	1	1.20	
N28		0.988 Diam. x 0.252	Flat Contacts—, +1.25		0.4	1	1.15	
N28T		0.988 Diam. x 0.252 (plus tabs)	Solder Tabs—, +1.25		0.4	1	1.25	
N32		0.988 Diam. x 0.343	Flat Contacts—, +1.25		0.44	1	1.20	
N32T		0.988 Diam. x 0.343 (plus tabs)	Solder Tabs—, +1.25		0.44	1	1.30	
N33		0.988 Diam. x 0.347	Flat Contacts—, +1.25		0.46	1	1.40	
N33T		0.988 Diam. x 0.347 (plus tabs)	Solder Tabs—, +1.25		0.46	1	1.50	
N36		1.697 Diam. x 0.286	Flat Contacts—, +1.25		1.16	1	2.10	
N36T		1.697 Diam. x 0.286 (plus tabs)	Solder Tabs—, +1.25		1.16	1	2.20	
N38		1.355 Diam. x 0.380	Flat Contacts—, +1.25		1.0	1	2.50	
N38T		1.355 Diam. x 0.380 (plus tabs)	Solder Tabs—, +1.25		1.0	1	2.60	
N39		1.984 Diam. x 0.394	Flat Contacts—, +1.25		2.0	1	3.80	
N40		1.984 Diam. x 0.394	Flat Contacts—, +1.25		2.0	1	4.00	
N40T		1.984 Diam. x 0.394 (plus tabs)	Solder Tabs—, +1.25		2.0	1	4.10	
N41		1.984 Diam. x 0.719	Flat Contacts—, +1.25		3.4	1	6.70	
N41T		1.984 Diam. x 0.719 (plus tabs)	Solder Tabs—, +1.25		3.4	1	6.80	
S41		0.455 Diam. x 0.165	Flat Contacts—, +1.5		0.06	6	0.35	Novelties
E42		1-9/32 Diam. x 2.390	Flat Contacts—, +1.40		5.85	1	2.50	Instruments, Hobby, Transistor Applications, Miscellaneous
E42N		1-9/32 Diam. x 2.390	Flat Contacts—, +1.35		5.85	1	2.75	
N43		1.984 Diam. x 0.988	Flat Contacts—, +1.25		4.8	1	8.15	
N43T		1.984 Diam. x 0.988 (plus tabs)	Solder Tabs—, +1.25		4.8	1	8.25	
N45		17/32 Diam. x 1-31/32	Solder Tabs—, +1.25		0.8	1	3.00	
N46		17/32 Diam. x 1-31/32	Flat Contacts—, +1.25		0.8	1	2.75	
N52		17/32 Diam. x 3-35/64	Solder Tabs—. +1.25		1.4	1	4.55	
N53		0.900 Diam. x 1.750	Flat Contacts—, +1.25		2.0	1	—	
N54		61/64 Diam. x 1-55/64	Flat Contacts—, +1.25		3.0	1	5.90	
N55		1.344 Diam. x 1.460	Flat Contacts—, +1.25	—	3.2	1	—	
N56		1-11/32 Diam. x 2-13/32	Flat Contacts—, +1.25		4.5	1	5.90	
N57		1-11/32 Diam. x 2-13/32	Flat Contacts—, +1.25		6.0	1	8.05	
N58		1.344 Diam. x 3.600	Flat Contacts—, +1.25		7.8	1	—	Instruments, Transistor Applications Miscellaneous
N59		1.344 Diam. x 4.218	Flat Contacts—, +1.25		9.2	1	—	
N66		1-1/16 Diam. x 1-57/64	Solder Tabs—, +6		2.3	1	6.75	
N67		1-15/32 x 1-15/32 x 3-25/32	Wire Leads—, +6		8.3	1	26.40	
N70		3-53/64 x 1-35/64 x 3-5/8	Wire Leads—, +6	1	12	1	42.30	
N73		1-23/64 x 1-23/64 x 2-13/32	Nut & Stud; Tab—, +1.25		5.9	1	8.65	
N74		1-23/64 x 1-23/64 x 3-25/64	Nut & Stud; Tab—, +1.25		9.2	1	10.15	
N75		1-23/32 x 2 x 3-5/32	Nut & Stud—, +1.25		12.3	1	13.35	
N76		1-23/32 x 2 x 3-45/64	Nut & Stud—, +1.25		15.2	1	14.60	
S76		0.455 Diam. x 0.200	Flat Contacts—, +1.50		0.08	6	0.40	Novelties
N77		1-23/32 x 2 x 4-1/4	Nut & Stud—, +1.25	1	1.6	1	15.95	
N78		3-1/32 x 2-15/64 x 3-29/32	Nut & Stud—, +1.25		12.5	1	17.10	Inst., Hobby, Transistor Appl., Misc.
N79		1-1/16 x 3-37/64 x 4-15/16	Nut & Stud—, +1.25	1	12	1	19.70	Instrument
N81		1-25/64 x 3-37/64 x 4-15/16	Nut & Stud—, +1.25	2	2.9	1	23.95	Transistor Applications
N82		3-1/32 x 1-3/16 x 4-17/32	Nut & Stud—, +1.25	1	9.5	1	30.75	Inst., Hobby, Transistor Appl., Misc.
N83		1-45/64 x 3-37/64 x 4-15/16	Nut & Stud—, +1.25	2	9.6	1	28.45	Miscellaneous
N85		2-1/64 x 3-37/64 x 4-15/16	Nut & Stud—, +1.25	3	1.6	1	32.75	
E90	910	0.470 Diam. x 1.130	Flat Contacts—, +1.5		0.35	3	0.35	Radio, Electronic
E91	15	9/16 Diam. x 1-31/32	Flat Contacts—, +1.5		0.75	12	0.50	Radio, Electronic
E92		.400 Diam. x 1.735	Flat Contacts—, +1.5		0.4	12	0.45	Electronic Photoflash
E93	14	1-1/32 Diam. x 1-15/16	Flat Contacts—, +1.5		2.0	12	0.60	Radio, Electronic
E94	927	1-11/32 Diam. x 1-7/32	Flat Contacts—, +1.5		1.8	12	0.50	Electronic Photoflash, Communications Equipment
E95	13	1-11/32 Diam. x 2-13/32	Flat Contacts—, +1.5		4.1	12	0.75	
E97S		1-11/32 Diam. x 5-7/32	Ins. Screw—, +1.5		9	12	1.10	Hobby
†D99	813	1-11/32 Diam. x 2-13/32	Flat Contacts—, +1.5		3.3	48	0.25	Flashlight, Toys
A100	13	1-11/32 Diam. x 2-13/32	Flat Contacts—, +1.5		3.3	48	0.25	Portable Radio "A", Transistor
E113		0.660 Diam. x 0.845	Flat Contacts—, +4.05		0.45	1	3.00	Instruments
E114		0.660 Diam. x 1.080	Flat Contacts—, +5.40		0.59	1	2.60	Instruments
E115		0.660 Diam. x 1.40	Flat Contacts—, +7		0.73	1	2.35	Instruments
E115N		0.660 Diam. x 1.40	Flat Contacts—, +6.75		0.73	1	2.65	Instruments
E126	1611	0.724 Diam. x 2	Flat Contacts—, +8.4		1.65	1	1.50	Transistor Radio
E132	1200	0.662 Diam. x 1.315	Flat Contacts—, +2.80		0.9	2	1.25	Transistor Applications

COMPLETE LINE SPECIFICATIONS (cont.)

"Eveready" Battery Number	NEDA Number	Overall Dimensions in Inches L W H	Terminals & Voltages	Battery Weight lbs.	Battery Weight ozs.	Unit Pkg. Quan.	List Price Each	Major Use
E132N		0.662 Diam. x 1.315	Flat Contacts—, +2.70		0.9	2	$1.55	Transistor Applications
E133	1304	0.662 Diam. x 1.965	Flat Contacts—, +4.2		1.4	12	1.50	Transistor Applications
E133N	1304	0.662 Diam. x 1.965	Flat Contacts—, +4.05		1.4	2	1.80	Transistor Applications
E134		0.662 Diam. x 2.620	Flat Contacts—, +5.60		1.9	2	2.10	Transistor Applications
E134N		0.662 Diam. x 2.620	Flat Contacts—, +5.40		1.9	2	2.40	Transistor Applications
E135		0.662 Diam. x 3.275	Flat Contacts—, +7.00		2.4	1	2.65	Instruments
E135N		0.662 Diam. x 3.275	Flat Contacts—, +6.75		2.4	1	3.15	Instruments
E136		0.662 Diam. x 3.930	Flat Contacts—, +8.40		2.9	1	3.20	Instruments
E136N		0.662 Diam. x 3.930	Flat Contacts—, +8.10		2.9	1	3.45	Instruments
E137		0.662 Diam. x 4.585	Flat Contacts—, +9.80		3.1	1	3.75	Instruments
E137N		0.662 Diam. x 4.585	Flat Contacts—, +9.45		3.1	1	4.20	Instruments
E145		21/32 Diam. x 1-3/16	Flat Contacts—, +7		0.7	1	2.40	Electronic
E146	1604	1-1/32 x 5/8 x 2	Min. Snap—, +8.40		1.6	6	1.50	Transistor Radio
E152		0.485 Diam. x 1.140	Flat Contacts—, +2.80		0.42	1	1.10	Instruments
E152N		0.485 Diam. x 1.140	Flat Contacts—, +2.70		0.42	1	1.25	Instruments
E153		0.485 Diam. x 1.708	Flat Contacts—, +4.20		0.4	1	2.10	Instruments
E153N		0.485 Diam. x 1.708	Flat Contacts—, +4.05		0.4	1	1.95	Instruments
E162		0.662 Diam. x 0.887	Flat Contacts—, +2.70		0.58	1	1.30	Instruments
E163		0.662 Diam. x 1.327	Flat Contacts—, +4.2		0.87	2	1.50	
E163N		0.662 Diam. x 1.327	Flat Contacts—, +4.05		0.87	2	1.60	
E164		0.662 Diam. x 1.767	Flat Contacts—, +5.6		1.16	12	1.75	Transistor Applications
E164N		0.662 Diam. x 1.767	Flat Contacts—, +5.4		1.16	2	1.95	
E165		0.662 Diam. x 2-7/32	Flat Contacts—, +7.0		1.45	2	2.30	
E165N		0.662 Diam. x 2-7/32	Flat Contacts—, +6.75		1.45	2	2.45	
E169		0.662 Diam. x 3-63/64	Flat Contacts—, +12.6		4.2	1	4.95	Instruments
E175		1/2 Diam. x 1-3/32	Flat Contacts—, +7.0		1.0	10	1.50	Transistor Radio
E177	1606	35/64 Diam. x 1-29/32	Min. Snap—, +9.8		0.67	1	1.85	Transistor Radio
206	1611	3/4 Diam. x 2	Flat Contacts Neg. Recessed—, +9		1.2	1	0.75	Transistor Radio
216	1604	1-1/32 x 11/16 x 1-29/32	Min. Snap—, +9		1.3	12	0.69	Transistor Radio
226	1600	1 Diam. x 1-15/16	Snap Type—, +9		2.0	6	0.89	Transistor Radio
228		1 Diam. x 2-7/16	Snap Type—, +12		2.3	1	1.50	Transistor Radio
E233	1300	1-1/64 Diam. x 1-31/32	Flat Contacts—, +4.2		3.0	1	2.85	Transistor Radio
E233N		1-1/64 Diam. x 1-31/32	Flat Contacts—, +4.05		3.0	1	3.20	Instrument
E234		1-1/64 Diam. x 2-5/8	Flat Contacts—, +5.6		3.88	1	3.45	Instrument
E234N		1-1/64 Diam. x 2-5/8	Flat Contacts—, +5.4		3.88	1	4.15	Instrument
E235N		1.015 Diam. x 3-1/4	Flat Contacts—, +6.75		4.85	1	4.50	Instrument
E236N		1.015 Diam. x 3-7/8	Flat Contacts—, +8.1		5.82	1	5.50	Instrument
239	1900	1-21/64 x 1-1/32 x 2-11/16	Socket—, +9, +13.5		3	1	1.50	Transistor Radio
243	1610	1-13/32 x 1-11/32 x 2-3/4	Min. Snap—, +4.5		4.5	1	1.70	Transistor Radio
246	1602	1-13/32 x 1-11/32 x 2-3/4	Min. Snap—, +9		4.5	1	1.85	Transistor Radio
266	1605	1-13/16 x 1-13/16 x 2-7/16	Snap Type—, +9		7	1	1.75	Transistor Radio
274	1400	2-9/16 x 2-1/32 x 7-29/32	Snap Type—, +6	2	7	1	4.75	Transistor Radio
276	1603	2-9/16 x 2-1/32 x 3-5/32	Snap Type—, +9		15	1	1.80	Transistor Radio
E286		1.0 Diam. x 1-15/16	Snap Type—, +8.4		2.6	6	1.95	Transistor Radio
E289		1.0 Diam. x 2-13/32	Snap Type—, +12.6		3.6	6	2.95	Transistor Radio
E312		0.310 Diam. x 0.140	Flat Contacts—, +1.40		0.02	6	0.35	Instruments
333	1306	0.662 Diam. x 1.965	Flat Contacts—, +4.5		0.9	1	0.89	Transistor Radio
W-350	711	3-1/32 x 1-7/8 x 4-31/32	Ins. Screw—, +22.5, +45		14.5	1	3.85	Radio, Transceivers, Instruments
W-351		3-5/8 x 2-1/4 x 3-11/16	Screw—, +22.5, +45	1	5.5	1	8.25	Radio, Transceivers, Instruments
W-352	701	2-21/32 x 1-11/32 x 4-9/16	Ins. Screw—, +3		12.5	1	1.35	Electronic Devices, Instruments
W-353	11	2-19/32 x 1-3/8 x 4-1/4	Socket—, +1.5		12.5	1	1.25	Portable Radio
****W-354	700	2-21/32 x 1-11/32 x 4-3/8	Screw—, +1.5		12.2	1	—	Instruments
W-356	*	2-5/8 x 2-5/8 x 4-9/16	Ins. Screw—, +3	1	6	1	1.90	Radio and Electric Devices
W-357	901	3-7/8 x 2-11/16 x 5-13/16	Fahnestock—, +3	2	12	1	2.25	Model Ignition, Telephone
W-358		2-15/16 x 1-3/16 x 4-1/8	Ins. Screw—, +45		8.75	1	3.85	Industrial
W-359	206	3-9/16 x 2-1/4 x 4-1/2	Socket—, +45	1	11.8	1	3.85	Portable "B"
W-361	227	1-11/32 x 1-11/32 x 11-23/32	Flat Contacts—, +103.5	1	4	1	6.95	Portable "B"
W-362		2-15/16 x 11/16 x 1-3/4	Screw+, −4.5, −7.5		1.5	1	2.35	Radio "C"
◆W-363F	*	8-1/32 x 4-1/16 x 7-5/8	Fahnestock—, +22.5, +45	10	5	1	7.65	Heavy Duty Radio "B"
◆W-364F	*	8-1/8 x 4-7/16 x 7-11/16	Fahnestock—, +22.5, +45	11	14	1	9.20	Heavy Duty Radio "B"
◆W-365F	723	8-1/16 x 2-15/16 x 7-5/8	Fahnestock—, +22.5, +45	7	7.5	1	6.55	Industrial "B"
W-366	407	9-1/32 x 2-1/32 x 4-23/32	Socket—"A", +1.5 "A" —"B", +63 "B"	4	4	1	9.50	Portable Radio "A-B"
W-367	408	9-1/8 x 2-3/4 x 4-7/16	Socket—"A", +7.5 "A", —"B", +63 "B"	4	5	1	9.50	Portable Radio "A-B"
W-368	*	9-1/32 x 2-23/32 x 3-9/16	Recessed Plug—"A", +6 "A", —"B", +75 "B"	4		1	11.50	Portable Radio "A-B"
W-369	410	9-15/16 x 2-1/4 x 4-23/32	Socket—"A", +1.5 "A", —"B", +90 "B"	4	5	1	8.50	Portable Radio "A-B"
W-371		1-5/32 x 1-5/32 x 2-9/16	Socket (including plug)—, +3		2.2	1	1.10	Model Ignition
E400	1106	0.455 Diam. x 0.135	Flat Contacts—, +1.40		0.04	6	0.35	Transistor Applications
E400N		0.455 Diam. x 0.135	Flat Contacts—, +1.35		0.04	6	0.45	Transistor Applications
E401	1102	0.470 Diam. x 1.130	Flat Contacts—, +1.40		0.4	3	0.50	Transistor Applications
E401N		0.470 Diam. x 1.130	Flat Contacts—, +1.35		0.4	1	0.65	Transistor Applications
411	208	1-1/32 x 5/8 x 1-29/64	Flat Contacts—, +15		0.8	1	1.15	Pocket Radio "B", Instruments
412	215	1-1/32 x 5/8 x 2	Flat Contacts—, +22.5		1.2	1	1.50	Pocket Radio "B", Instruments
413	210	1-1/32 x 5/8 x 2-9/16	Flat Contacts—, +30		1.4	1	1.75	Pocket Radio "B", Instruments
415	213	1-3/64 x 5/8 x 3-11/16	Min. Snap—, +45		2.5	1	2.50	Pocket Radio "B"
416	217	1-21/64 x 63/64 x 3-1/2	Min. Snap—, +67.5		4	1	2.95	Portable Radio "B"
417	224	1-5/16 x 31/32 x 1-9/16	Flat Contacts—, +15		1.8	1	1.65	Pocket Radio "B", Instruments
420	225	1-5/16 x 31/32 x 2-3/16	Flat Contacts—, +22.5		2.5	1	1.75	Pocket Radio "B", Instruments
425P		1-23/64 x 1-1/32 x 3-15/16	Socket—, +22.5		4.1	1	1.95	Instruments
430	*	1-5/16 x 1 x 2-13/16	Flat Contacts—, +30		3.2	1	2.15	Pocket Radio "B", Instruments
430P		1-23/64 x 1-1/32 x 3-11/32	Socket—, +30		3.2	1	2.15	Instruments
433P		2-21/32 x 1-1/64 x 3-1/16	Socket—, +33		6	1	2.75	Instruments

COMPLETE LINE SPECIFICATIONS (cont.)

"Eveready" Battery Number	NEDA Number	Overall Dimensions in Inches L W H	Terminals & Voltages	Battery Weight lbs.	Battery Weight ozs.	Unit Pkg. Quan.	List Price Each	Major Use
437	212	1-15/16 x 1-15/32 x 6-15/32	Snap Type—, +75		14.8	1	$ 4.50	Portable Radio "B"
E450		0.455 Diam. x 0.570	Flat Contacts—, +1.35		0.18	4	0.85	Instruments
455	*	2-21/32 x 1 x 3-11/16	Snap Type—, +45		7.8	1	3.25	Portable Radio "B"
455P		2-21/32 x 1-1/64 x 3-29/32	Socket—, +45		8.6	1	3.25	Instruments
457	203	2-13/16 x 1-3/8 x 2-1/2	Snap Type—, +67.5		7.4	1	3.85	Portable Radio "B"
460K		1-29/64 x 1-3/8 x 2.344	Flat Contacts—, +45		5.3	6	2.50	Photoflash
467	200	2-13/16 x 1-3/8 x 3-45/64	Snap Type—, +67.5		12	1	3.85	Portable Radio "B"
468	200	2-13/16 x 1-3/8 x 3-45/64	Snap Type—, +67.5		12	1	3.95	Radio, Electronic
477	211	1-29/32 x 63/64 x 5-7/16	Snap Type—, +67.5		8.6	1	3.85	Portable Radio "B"
479	214	1-31/32 x 1-1/32 x 7-15/32	Snap Type—, +90		12	1	4.25	Portable Radio "B"
482	202	3-19/32 x 1-27/32 x 5-1/2	Socket—, +45	1	15	1	4.25	Portable Radio "B"
484	207	3-31/32 x 2-17/32 x 5-5/16	Socket—, +45	3	2	1	4.95	Fluorescent Lantern
487		5-1/8 x 2-1/16 x 7-1/4	Socket—, +22.5, +45	4	2	1	5.50	Farm Radio "B"
489		4-11/32 x 2-11/16 x 4-3/16	Socket—, +225	2	12	1	9.95	Electronic Photoflash
490	204	3-23/32 x 1-3/8 x 3-45/64	Snap Type—, +90		15	1	4.50	Portable Radio "B"
491		2-19/32 x 1-5/16 x 4-1/2	Flat Recessed & Socket—, +240		13	1	7.95	Electronic Photoflash
492		3-9/16 x 2-29/32 x 4-29/32	Socket—, +180, +225	2	8	1	9.95	Electronic Photoflash
493	722	2-11/16 x 2-7/32 x 3-29/32	Pinjacks—, +300		14.5	1	11.95	Geiger Counter
495	*	1-15/16 x 1-15/32 x 7-1/8	Snap Type—, +90	1	—	1	4.95	Portable Radio "B"
497		3 x 1-19/32 x 5-5/8	Flat Recessed—, +180, +510	1	10	1	15.95	Electronic Photoflash
E502		0.550 Diam. x 1.968	Flat Contacts—, +1.35		1.05	1	1.05	Transistor Applications
504	220	5/8 x 19/32 x 1-3/8	Flat Contacts—, +15		0.6	1	1.15	Pocket Radio "B", Instruments
505	221	5/8 x 19/32 x 1-63/64	Flat Recessed—, +22.5		0.8	1	1.50	Pocket Radio "B", Instruments
506	223	1-13/64 x 5/8 x 1-27/64	Flat Contacts—, +30		0.9	1	1.85	Pocket Radio "B", Instruments
507	222	5/8 x 19/32 x 2.605	Flat Contacts—, +30		0.9	1	1.85	Pocket Radio "B", Instruments
509	908	2-5/8 x 2-5/8 x 4-13/32	Coil Springs—, +6	1	5.5	1	1.25	Lanterns
510F	917	2-5/8 x 2-5/8 x 4-13/32	Fahnestock—, +6	1	4	1	1.25	Miscellaneous
510S	*	2-5/8 x 2-5/8 x 4-3/8	Screw—, +6	1	7	1	1.25	Miscellaneous
515	*	35/64 Diam. x 1-31/32	Flat Contacts—, +1.5		0.5	24	0.15	Flashlights, Toys
520	930	5-17/32 x 4-21/32 x 2-21/32	Ins. Screw—, +6	2	8	1	4.95	Lanterns, Electronics
E520		0.495 Diam. x 0.286	Flat Contacts—, +1.40		0.07	6	0.30	Transistor Applications
523	1306	0.662 Diam. x 1.965	Flat Contacts—, +4.5		1.1	1	1.00	Transistor Radio
531		0.622 Diam. x 2.290	Snap Type—, +4.5		1.25	1	1.25	Photographic
560		2-21/32 x 1-17/32 x 7-5/32	Socket—, +7.5	1	10	1	6.50	Portable Television
561		8-5/16 x 2-13/16 x 5-7/8	Socket—, +15	6		1	15.95	Portable Television
563		12-3/64 Diam. x 7-5/32	Flat Contacts—, +4.5		15	3	4.15	Portable Television
564		8-5/16 x 2-13/16 x 5-7/8	Socket—, +13.5	5	8	1	14.95	Portable Television
E601		0.627 Diam. x 1.40	Flat Contacts—, +1.35		1.22	1	1.30	Instruments
621		2-9/16 Diam. x 13	Screw—, +3	4	10	12	4.25	Fishing Buoy
E625		0.615 Diam. x 0.238	Flat Contacts—, +1.40		0.14	4	0.50	Transistor Applications
E625N		0.615 Diam. x 0.238	Flat Contacts—, +1.35		0.14	4	0.65	Transistor Applications
E630	1104	0.615 Diam. x 0.238	Flat Contacts—, +1.40		0.17	4	0.50	Transistor Applications
E630N		0.615 Diam. x 0.238	Flat Contacts—, +1.35		0.17	4	0.65	Transistor Applications
635 (See 1035)								
E640	1105	0.625 Diam. x 0.440	Flat Contacts—, +1.40		0.38	4	0.50	Transistor Applications
E640N		0.625 Diam. x 0.440	Flat Contacts—, +1.35		0.38	4	0.65	Transistor Applications
E675		0.455 Diam. x 0.210	Flat Contacts—, +1.40		0.09	6	0.40	Instruments
702		2-17/32 x 7/8 x 3-1/8	Socket—, +4.5		5	1	2.75	Shot Firing
703	*	2-7/16 x 27/32 x 3-1/16	Spring—, +4.5		5	1	1.50	Instruments
704		2-11/16 x 1-11/32 x 4-3/8	Socket—, +3		11.8	1	2.95	Shot Firing
706	902	8-5/16 x 2-13/16 x 6-7/16	Ins. Screw—, +6	5	14	1	5.98	Ignition, Emergency Lighting
707	26	2-9/16 x 2-1/32 x 2-13/16	Snap Type—, +7.5		12	1	1.65	Portable Radio "A"
708		2-5/8 x 2-3/4 x 4-13/16	Socket—, +22.5	1	11	1	6.25	Shot Firing
711	700	2-21/32 x 1-11/32 x 4-3/8	Screw—, +1.5		12.2	1	1.15	Model Ignition "Glo-Plug"
713	8	3-29/32 x 53/64 x 2-27/32	Socket—, +7.5		6.3	1	2.95	Portable Radio "A"
714		3-31/32 x 1-11/32 x 3-1/2	Screw—, +4.5		14.5	1	2.25	Telephone Test Sets
715	903	7-1/4 x 4-1/16 x 6-7/16	Ins. Screw—, +7.5	7	10	1	7.25	Ignition, Emergency Lighting
716	*	8-37/64 x 4-1/16 x 6-7/16	Ins. Screw—, +9	8	8	1	8.25	Ignition, Emergency Lighting
717	9	2-5/32 x 1-15/16 x 3-1/32	Socket—, +7.5		8	6	1.75	Portable Radio "A"
718	1	3-29/32 x 2-3/4 x 5-7/16	Socket—, +6	2	4	1	4.10	Portable Radio "A"
720	18	2-25/32 x 1-13/32 x 3-1/32	Socket—, +1.5		6.5	1	1.45	Portable Radio "A"
724	2	1-7/32 x 1-7/32 x 2-11/32	Flat Contacts—, +6		2.5	1	1.25	Portable Radio "A"
726	19	4-3/32 x 1-7/16 x 2-15/16	Socket—, +4.5		10.5	1	1.50	Portable Radio "A"
727	428	8-7/8 x 2-1/8 x 3-25/32	Recessed Plug—"A", +9 "A", —"B", +90 "B"	2	14	1	7.45	Portable Radio "A-B"
729	*	3-27/32 x 2-7/32 x 7-13/16	Socket—"A", +1.5 "A", —"B", +90 "B"	2	7	1	6.25	Portable Radio "A-B"
731	918	5-11/32 x 2-27/32 x 4-15/16	Ins. Screw—, +6	3	4	1	2.95	Lantern
732	926	5-11/32 x 2-27/32 x 4-15/16	Ins. Screw—, +12	3	4	1	2.95	Lantern
735	900	2-5/8 x 2-5/8 x 4-3/8	Screw—, +1.5	1	7	1	1.25	Model Ignition "Glo-Plug"
736	3	3-15/16 x 1-5/16 x 4-3/32	Socket—, +4.5	1		1	1.50	Portable Radio "A"
738	205	3 x 2-5/16 x 4-1/8	Socket—, +22.5, +45	1	3	1	3.95	Portable Radio "B"
740	719	4-19/32 x 3-7/8 x 7-3/4	Socket—, +1.5	6		1	10.95	Farm Radio "A"
741	17	3-7/8 x 2-11/16 x 5-3/8	Socket—, +1.5	2	10	1	3.45	Portable Radio "A"
742	4	2-5/8 x 2-5/8 x 3-27/32	Socket—, +1.5	1	6	1	1.65	Portable Radio "A"
743	5	3-13/16 x 2-5/8 x 4-1/32	Socket—, +1.5	1	15	1	3.25	Portable Radio "A"
744	*	2-5/8 x 2-5/8 x 3-27/32	Socket—, +6	1	6	1	1.65	Portable Radio "A"
746	7	3-15/16 x 1-5/16 x 4-21/32	Socket—, +4.5	1	3	1	1.80	Portable Radio "A"
750	*	1-11/32 x 11/16 x 2-21/32	Spring—, +3		2	1	0.95	Instruments
751	705	2 x 11/16 x 2-21/32	Spring—, +4.5		3	1	1.10	Instruments
752	400	14-1/16 x 2-11/16 x 4-1/16	Recessed Plug—"A", +9 "A", —"B", +90 "B"	6	2	1	8.25	Portable Radio "A-B"
752W	*	14-1/16 x 2-11/16 x 4-1/16	Recessed Plug—"A", +9 "A", —"B", +90 "B", —, +1.5	6	8	1	9.25	Portable Radio "A-B"

COMPLETE LINE SPECIFICATIONS (cont.)

"Eveready" Battery Number	NEDA Number	Overall Dimensions in Inches L W H	Terminals & Voltages	Battery Weight lbs.	Battery Weight ozs.	Unit Pkg. Quan.	List Price Each	Major Use
753	401	9-7/32 x 2-23/32 x 4-5/16	Socket—"A", +7.5 "A", +9 "A", —"B", +90 "B"	4	12	1	$7.75	Portable Radio "A-B"
754	402	10-15/32 x 3-1/4 x 4	Socket—"A", +7.5 "A", +9 "A", —"B", +90 "B"	6	1	1	9.45	Portable Radio "A-B"
755	403	8-9/16 x 3-3/4 x 2-7/16	Socket—"A", +6 "A", +7.5 "A", —"B", +75 "B"	3	9	1	7.25	Portable Radio "A-B"
756	*	8-7/8 x 2-1/8 x 3-25/32	Socket—"A", +7.5 "A", +9 "A", —"B", +90 "B"	2	14	1	6.95	Portable Radio "A-B"
757	406	9-7/32 x 2-23/32 x 4-7/32	Recessed Plug—"A", +9 "A", —"B", +90 "B"	4	12	1	7.95	Portable Radio "A-B"
759	*	15-11/16 x 4-1/32 x 6-15/16	Socket—"A", +1.5 "A", —"B", +90 "B"	16	4	1	10.65	Farm Radio "A-B"
761T	712	4-1/16 x 1-15/32 x 3-1/2	Screw—, +1.5, +3, + 4.5		14	1	2.50	Telephone Test Sets
762S	709	4-3/32 x 2-9/16 x 5-7/16	Ins. Screw—, +22.5, +45	2	12	1	4.35	Instruments
763	710	3-1/2 x 2-3/32 x 2-15/16	Screw—, +22.5		14	1	2.35	Instruments
766T	*	6-3/4 x 4-1/8 x 3-15/16	Fahnestock—, +16.5, +18, +19.5, +21, +22.5	4	10	1	6.95	Switchboard Testing
771	*	3-29/32 x 1-3/8 x 3-1/16	Socket+, —3, —4.5		13	1	2.75	Radio "C"
773	*	3-29/32 x 7/8 x 3-1/8	5 Screw; 1 wire+, —1.5, —3, —4.5, —6, —7.5		9	1	2.35	Radio "C"
776	*	7-27/32 x 4-1/8 x 9-7/8	Socket & Recessed Plug—"A", +7.5 "A", +9 "A", —"B", +90 "B"	14	12	1	14.95	Home Receiver "A-B"
778	*	4-1/8 x 2-17/32 x 3-7/16	Fahnestock+, —3, —4.5, —6, —9, —10.5, —16.5, —22.5	1	8	1	5.50	Instruments
781	*	2-15/32 x 55/64 x 3	Screw+, —4.5		5	1	1.40	Instruments
785	431	8-3/8 x 3-5/8 x 2-1/4	Socket—"A", +7.5 "A", —"B", +75 "B"	2	12	1	6.90	Portable Radio "A-B"
789		5-9/32 x 1-7/16 x 3-1/4	Flat—, +3	1	1.5	1	3.25	Fingerprint Camera
799		8-5/32 x 4-1/4 x 8-19/32	Fahnestock—, +22.5, +45, +49.5	13	5	1	13.50	Camera Cranking
812		13/32 Diam. x 1-3/4	Flat Contacts—, +1.5		0.3	12	0.20	Photoflash
815		9/16 Diam. x 1-31/32	Flat Contacts—, +1.5		0.6	24	0.25	Photoflash
835		1-1/32 Diam. x 1-15/16	Flat Contacts—, +1.5		1.4	24	0.25	Photoflash
850		1-11/32 Diam. x 2-13/32	Flat Contacts—, +1.5		3.3	12	0.25	Photoflash
†904	910	0.445 Diam. x 1.180	Flat Contacts—, +1.5		0.22	6	0.125	Flashlight, Novelties
†912	24	13/32 Diam. x 1-3/4	Flat Contacts—, +1.5		0.3	12	0.15	Flashlight, Toys
†915	*	9/16 Diam. x 1-31/32	Flat Contacts—, +1.5		0.6	24	0.20	Flashlight, Toys
†935	814	1-1/32 Diam. x 1-15/16	Flat Contacts—, +1.5		1.4	24	0.20	Flashlight, Toys
†950	813	1-11/32 Diam. x 2-13/32	Flat Contacts—, +1.5		3	48	0.20	Flashlight, Toys
960P	23	1-11/32 Diam. x 4-1/16	Socket—, +1.5		5	1	1.10	Portable Radio "A"
964	20	1-11/32 Diam. x 4-3/16	Flat Contacts—, +1.5		5.9	12	0.45	Portable Radio "A"
1015	15	9/16 Diam. x 1-31/32	Flat Contacts—, +1.5		0.6	24	0.25	Transistor Radio
1016		1-9/64 x 19/32 x 2-1/64	Flat Contacts—, +1.5		1.1	1	0.45	Pocket Radio "A"
•1035 (formerly 635)	14	1-1/32 Diam. x 1-15/16	Flat Contacts—, +1.5		1.4	12	0.25	Portable Radio "A" Transistor
•1050	See 1150							
1052P		1-1/8 Diam. x 3-29/32	Socket—, +1.5		4	1	0.95	Instruments
•1150 (formerly 1050)		1-11/32 Diam. x 2-13/32	Flat Contacts—, +1.5		3.3	48	—	Ind. Flashlight
E1438N		1.462 Diam. x 0.390	Flat Contacts—, +1.35		1.40	1	1.85	Underwater Instruments
E1450N		1.462 Diam. x 0.513	Flat Contacts—, +1.35		1.85	1	2.15	Underwater Instruments
1461	907	10-7/16 x 2-25/32 x 7-9/32	Ins. Screw—, +6	9	9	1	4.98	Ignition, Fence Controllers
1462		5-3/8 x 5-3/8 x 7-1/4	Ins. Screw—, +6	9	7	1	5.98	Ignition, Fence Controllers
1463	922	10-13/32 x 2-25/32 x 7-9/32	Ins. Screw—, +12	7	8	1	5.98	Toy Cars
1562	*	7-15/16 x 5 x 7-1/4	Ins. Screw—, +7.5	11	10	1	7.25	Ignition, Searchlights
1662	913	7-27/32 x 5-9/32 x 7-9/32	Ins. Screw—, +9	14	1	1	8.25	Ignition, Searchlights
2314	2400	1-21/64 x 1-1/32 x 2-7/8	Socket+, —12, —21		3	1	2.25	Transistor Radio
2356N	1612	2-3/16 x 1-5/32 x 6-1/4	Snap Type—, +9	1	1	1	1.60	Transistor Radio
2506	1601	8 x 2-13/16 x 1-9/16	Socket—, +3, +6, +9	1	8	1	2.50	Transistor Radio
E2550		2.55 Diam. x 0.56	Flat Contacts—, +1.35		6.0	1	6.00	Underwater Instruments
2709N	1613	1-13/32 x 47/64 x 4-11/16	Snap Type—, +9		4.5	1	1.50	Transistor Radio
2713N	1403	1-13/32 x 47/64 x 4-11/16	Min. Snap—, +6		4	1	1.00	Transistor Radio
2731N	1303	2-13/16 x 1-3/4 x 8-11/32	Socket—, +4.5	2	11	1	2.75	Transistor Radio
2744N	920	2-21/32 x 2-21/32 x 3-7/8	Socket—, +6	1	14	1	1.19	Safety Flasher, Miscellaneous
2745N	924	2-21/32 x 2-21/32 x 4-7/16	Coil Springs—, +6	1	14	1	1.19	Safety Flasher, Lantern
2746N	925	2-21/32 x 2-21/32 x 4-3/8	Screw—, +6	1	14	1	1.19	Lighting, Miscellaneous
2761N	1608	2-9/32 x 1-1/4 x 7-31/32	Socket—, +9	1	9	1	2.25	Transistor Radio
2762N	1609	2-13/16 x 1-3/4 x 8-11/32	Socket—, +9	2	11	1	2.75	Transistor Radio
2780N	923	5-11/32 x 2-27/32 x 4-5/32	Socket—, +12	3	8	1	3.40	Safety Flasher, Miscellaneous
E302125		1-11/32 Diam. x 3-1/32	Wire Leads—, +7.00		3.9	1	8.20	Fire Alarm
E302157		2-1/2 x 1-3/8 x 4-1/4	Socket—, +1.35		13.5	1	15.50	Radiation Equipment
E302158		3-1/4 x 1-3/8 x 4-1/4	Socket—, +47.25	1	3.0	1	37.00	Radiation Equipment
E302227		11/16 Diam. x 15/16	Tabs—, +4.05		0.5	1	3.20	Meter
E302229		11/16 Diam. x 1-7/32	Tabs—, +5.40		0.62	1	3.35	Meter
E302240		2-1/4 x 1-3/8 x 5-9/32	Wire Leads—, +24.3	1	3.0	1	34.60	Instruments
E302249		23/32 Diam. x 1-15/32	Tabs—, +6.75		0.75	1	3.50	Radiation Equipment
E302250		11/16 Diam. x 1-29/32	Tabs—, +9.45		1.0	1	3.75	Radiation Equipment
E302257		1-5/16 Diam. x 2-7/16	Spec. Leads—, +1.35		6.4	1	14.25	Test Equipment
E302271		45/64 Diam. x 4-5/8	Wire Leads—, +1.35, +13.5		3.0	1	7.85	Instruments
E302351		1-1/16 Diam. x 2-5/8	Flat Contacts—, +5.40		4.5	1	5.60	Fire Alarm
E302354		3/4 Diam. x 1-1/4	Wire Leads—, +5.40		0.50	1	3.40	Radiation Equipment

COMPLETE LINE SPECIFICATIONS (cont.)

"Eveready" Battery Number	NEDA Number	Overall Dimensions in Inches L W H	Terminals & Voltages	Battery Weight lbs.	Battery Weight ozs.	Unit Pkg. Quan.	List Price Each	Major Use
E302358		3/4 Diam. x 2-5/32	Wire Leads−, +10.8		0.87	1	$ 5.45	Radiation Equipment
E302360		3/4 Diam. x 2-11/16	Wire Leads−, +13.5		1.0	1	7.00	Radiation Equipment
E302362		23/32 Diam. x 3-5/32	Wire Leads−, +16.2		1.13	1	7.40	Radiation Equipment
E302424		11/16 Diam. x 3-15/32	Tabs−, +6.75		2.5	1	4.95	Instruments
E302425		2-13/16 x 1 x 2-25/32	Snap−, +48.6		8.0	1	31.75	"B" Battery
E302435		11/16 Diam. x 1-1/2	Flat Contacts−, +6.75		0.75	1	4.40	Radiation Equipment
E302437		11/16 Diam. x 1-31/32	Flat Contacts−, +9.45		1.0	1	4.40	Radiation Equipment
E302462		2-13/16 x 1-17/32 x 6-3/8	Wire Leads−, +97.2	2		1	49.75	Transmitter "B"
E302463		2-1/8 Diam. x 2-5/16	Wire Leads−, +1.35		8.0	1	11.65	Geophysical
E302464		2-1/8 Diam. x 2-5/16	Wire Leads−, +6.75		8.0	1	14.10	Geophysical
E302465		2-3/16 Diam. x 3-3/4	Wire Leads−, +47.25	1	1.0	1	30.00	Geophysical
E302467		11/16 Diam. x 2-7/8	Tabs−, +5.40		2.0	1	3.60	Test Equipment
E302478		1-9/32 Diam. x 3-5/8	Flat Contacts−, +9.8		9.0	1	8.95	Wire Recorder
E302497		1-1/16 Diam. x 4-1/8	Screw−, +6.75		6.0	1	8.00	Test Equipment
E302499		2-3/4 x 1-3/8 x 3-21/32	Wire Leads−, +64.8	1		1	56.30	Missile
E302502		2-3/32 Diam. x 2-31/32	Wire Leads−, +94.5		10.5	1	38.50	Geophysical
E302506		1-3/8 x 3/4 x 2-1/8	Wire Leads+, −16.2, +4.05		3.0	1	14.10	Telemetry
E302510		2-7/32 x 2-25/32 x 2-5/32	Screw−, +1.35	1	5.0	1	29.65	Computer
E302519		2-3/4 x 1-7/16 x 2-11/32	Wire Leads−, +5.40		15.0	1	22.00	Test Equipment
E302527		2-5/32 x 1-15/32 x 3-3/8	Wire Leads−, +97.2		10.0	1	51.20	"B" Battery
E302539		1-3/8 x 3/4 x 3-1/32	Socket−, +21.6		2.35	1	18.85	Instruments
E302540		1-13/64 Diam. x 2-25/64	Tabs−, +1.35		6.0	1	5.50	Test Equipment
E302554		2-5/32 x 1-15/32 x 3-5/8	Snap−, +97.2		10.0	1	38.50	"B" Battery
E302558		2-3/4 x 1-3/8 x 3-21/32	Wire Leads−, +35.1, +64.8		15.0	1	37.50	Missile
E302579		1-13/32 x 3/4 x 3-3/16	Wire Leads−, +29.7		5.0	1	16.70	Test Equipment
E302580		2-23/32 x 2-23/32 x 3-29/32	Socket−, +27.0	2	6.0	1	40.00	Instruments
E302589		1-7/16 x 1-7/16 x 1-15/16	Socket−, +21.6		2.35	1	23.75	Instruments
E302642		1-9/32 Diam. x 2-5/8	Flat Contacts−, +7.00		5.0	1	6.55	Instruments
E302650		1-5/16 Diam. x 3-23/32	Solder Tabs−, +1.35		6.0	1	5.80	Computer-Voltage Reference Cell
E302651		1-5/16 Diam. x 2-7/16	Spec. Leads−, +1.35		6.14	1	5.75	Instruments
E302667		6-15/32 x 1-15/32 x 2-23/32	Wire Leads−, +6.75	1	14.7	1	34.40	Instruments
E302702		1-1/8 Diam. x 1-5/8	Wire Leads−, +2.70		2.0	1	5.00	Geophysical
E302795		1-7/16 x 1-7/16 x 4-29/32	Socket−, +10.8		11.8	1	29.60	Instruments
E302800		2-3/4 x 1-7/16 x 5	Snap−, +75.6	1	9.3	1	53.80	Instruments
E302830		3-15/32 x 7/8 x 6-1/2	Socket−, +6.75, +12.15		24.0	1	29.50	Instruments
E302896		2-9/16 x 1-13/16 x 2-1/4	3 Neg. Snap−, +9.45, +1.35		11.8	1	30.40	Recorder
E302904		1-11/32 Diam. x 2-31/32	Wire Leads−, +5.40		6.0	1	8.95	Meter
E302905		1-11/32 Diam. x 3-19/32	Wire Leads−, +6.75		9.0	1	10.95	Test Equipment
E302907		1-5/16 Diam. x 4-7/8	Wire Leads−, +9.45		11.6	1	14.40	Instruments
E302908		1-11/32 Diam. x 5-9/16	Wire Leads−, +10.8		12.0	1	16.00	Radiation Equipment
E302933		1.250 Diam. x 2-1/16	Flat Contacts−, +5.60		5.0	1	3.65	Tape Recorder
E302934		2-5/32 x 1-15/32 x 3-3/8	Wire Leads−, +97.2, 48.6		10.0	1	56.80	Instruments
E303021		2-5/16 x 1-5/16 x 5-7/8	Screw−, +24.30	2		1	62.25	Instruments
E303035		1-9/32 Diam. x 4-1/32	Flat Contacts−, +8.10		10.0	1	9.75	Instruments
E303053		11/16 Diam. x 5-5/8	Flat Contacts−, +6.75		6.5	1	6.30	Instruments
E303101		0.671 Diam. x 5-7/8	Flat Contacts−, +4.05		5.3	1	4.50	Transistor Tester Equipment
E303102		0.671 Diam. x 5-27/32	Flat Contacts & Holes−, +2.7, 5.4		5.2	1	6.45	Transistor Tester Equipment
E303113		6-1/2 x 1-1/16 x 3-1/2	Screw−, +1.35, 2.7, 4.05, 5.4, 6.75, 8.1, 9.45, 10.8	2		1	39.50	Voltage Reference Cell
E303145	1614	2-3/16 x 7/8 x 4-7/16	Snap −, + 8.40		8.8	4	8.95	Depth Finder
E303177		2-23/32 x 2-3/32 x 4-5/8	Socket−, +97.20	2		1	63.00	Missile
E303178		2-3/32 x 1-7/16 x 4-5/8	Socket−, +48.60	1		1	36.00	Instruments
E303186		1-9/32 Diam. x 2-13/16	Solder Tabs−, +16.20		1.5	1	11.25	Instruments
E303198		1-1/4 Diam. x 6-5/8	Flat Contacts−, +13.5		17.0	1	15.00	Instruments
E303211		2-1/16 Diam. x 2-5/16	Wire Leads−, +24.3		8.0	1	12.25	Moisture Meter
E303212		1/2 Diam. x 2	Flat Contacts−, +12.6		0.80	1	3.10	Remote Control Instruments
E303219		1/2 Diam. x 1-9/16	Flat Contacts−, +9.8		0.60	1	2.80	Auto Radio Converter (FM)
E303226		0.660 Diam. x 6.4	Flat Contacts−, +13.5		5.5	1	6.00	Test Instruments
E303232		21/32 x 1-1/2 x 2-5/16	Screw−, +6.75		8.0	1	9.75	Test Instruments
E303243		1-1/4 Diam. x 1-13/32	Flat Contacts−, +2.7		3.5	1	2.75	Medical Instruments
E303244		1-1/4 Diam. x 2-21/32	Flat Contacts−, +5.4		7.0	1	5.50	Medical Instruments

*NEDA number same as an "Eveready" battery number on a different battery. Omitted to prevent errors in shipping.
**Equipped with screw terminals unless Fahnestock spring terminals are specified.
***Equipped with Fahnestock spring terminals unless screw terminals are specified.
♦Furnished with Fahnestock spring terminals. If socket terminals required, specify W-363P, W-364P, W-365P.
****Discontinued No. W354 replaced by 711.
•Designates number change only, see 1035 for 635, and 1150 for 1050.

†Flashlight types.

(III) BATTERY REPLACEMENT GUIDE

MAKE & MODEL	"EVEREADY" BATTERIES
ACME	
CH-610	1-216
CH-620	4-1015, E9 or E91
ADMIRAL	
4B2	1-717, 1-477
4B20 Series	1-717, 1-477
4E21	1-717, 1-479
4F20 Series	1-717, 1-479
4H20 Series	1-717, 1-479
7L10 Series	6-A100 or E95
4P20 Series	4-1015, E9 or E91
4Z1	1-717, 1-467
4Z10 Series	1-717, 1-467
5K3	1-756
5K30 Series	1-756
7M10 Series	4-1015, E9 or E91
7P10 Series	1-754
7V1	4-1015, E9 or E91
202	1-717, 1-479
210 Series	1-717, 1-479
220 Series	8-1035 or E93
230 Series	8-1035 or E93
502	1-717, 1-479
510 Series	1-717, 1-479
520 Series	8-1035 or E93
530 Series	8-1035 or E93
560 Series	6-1035 or E93
580 Series	4-1015, E9 or E91
690 Series	4-1015, E9 or E91
703	4-1015, E9 or E91
708	6-1015, E9 or E91
711	4-1015, E9 or E91
739	6-1035 or E93
740 Series	6-1035 or E93
750 Series	6-1035 or E93
790 Series	4-1015, E9 or E91
(Clock)	1-1035 or E93
800 Series	4-1015, E9 or E91
810 Series	6-1035 or E93
(Clock)	1-1035 or E93
909	8-A100 or E95
Y790 Series	4-1015, E9 or E91
Y820 Series	4-1015, E9 or E91
Y2009 to Y2028	4-1015, E9 or E91
Y2060 Series	1-216
Y2080 Series	4-1015, E9 or E91
Y2092 Series	4-1015, E9 or E91
Y2100 Series	4-1035 or E93
Y2119	6-1035 or E93
Y2120 Series	6-1035 or E93
Y2137	6-1035 or E93
Y2200 Series	1-206
Y2210 Series	1-206
Y2220 Series	1-206
Y2230 Series	1-246
Y2250 Series	4-1035 or E93
Y2260 Series	1-266
Y2270 Series	1-206
Y2300 Series	1-206
Y2351 Series	6-1035 or E93
Y2371 Series	6-1035 or E93
Y2451 Series	4-1015, E9 or E91
Y2461 Series	4-1015, E9 or E91
LS-7181 (Remote TV)	1-E163
AEROVOICE	
DF1	2-484, 2-741
D4	4-738, 2-W356
TR1	2-482, 1-774
AIR CASTLE (Spiegel)	
B5	2-484, 1-718
BP115	2-484, 1-W360
BP12	2-484, 1-W360
F5	1-753
G5	2-484, 1-741
KB	2-484, 2-718
KD	2-484, 2-718
KD73	2-484, 3-A100 or E95
KG	1-467, 3-A100 or E95
TB-600 Series	2-484, 2-746
TF1	2-484, 1-742
1BR50	2-484, 1-744
1M	1-467, 1-746
18	2-484, 1-741
76W740	1-467, 2-A100 or E95
76W741	1-467, 2-A100 or E95
76W742	1-467, 2-A100 or E95
76W743	1-467, 2-A100 or E95
76, 747	1-467, 1-746
130B	2-484, 1-743

MAKE & MODEL	"EVEREADY" BATTERIES
AIR CASTLE (Spiegel) (Cont.)	
178	2-484, 1-743
178B4	2-484, 1-743
187B	2-484, 1-743
286	1-467, 1-746
378	2-484, 1-741
553	2-484, 1-742
554	2-484, 1-742
560-1	2-484, 1-741
561-1	2-484, 1-741
561-1M	2-484, 1-741
572	1-467, 1-746
591	2-484, 1-W360
611-1	2-484, 1-741
738-B5400	1-490, 1-746
900	2-484, 1-742
1555	2-484, 1-742
2861	2-484, 1-742
2962	2-484, 1-742
5025	2-482, 2-746
7121	2-484, 1-743
AIR KING	
444	1-467, 2-A100 or E95
3906	2-484, 1-741
3910	2-484, 1-741
3916	2-484, 1-743
4016	2-484, 1-743
AIRLINE (Montgomery Ward)	
GSE-1078A	1-477, 2-A100 or E95
GSL-1079A	1-753
1103A	1-717, 1-477
GEN-1090A	1-964, 1-477
GEN-1105A	1-717, 1-477
GEN-1106A	1-226
GEN-1112A	1-226
GEN-1116A	1-717, 1-477
GEN-1120B	6-A100 or E95
GEN-1130	1-216
GEN-1131	1-216
GEN-1202	1-216
GEN-1204	4-1035 or E93
GEN-1206	4-1035 or E93
GEN-1207	4-1035 or E93
GEN-1208	1-216
GEN-1209	1-216
GEN-1212	1-216
GEN-1214	4-1015, E9 or E91
GTC-1085A	2-964, 2-455
GTC-1086A	2-964, 2-455
GTM-1108	1-226
GTM-1109	1-226
GTM-1117	1-276, 1-479
GTM-1200	6-A100 or E95
GTM-1201	4-1015, E9 or E91
WG-5218A	1-E163
GEN-1213	1-216
GEN-1215	1-E164
GEN-1218	4-1015, E9 or E91
GEN-1219	4-1035 or E93
GEN-1220	1-216
GEN-1222	4-1035 or E93
GEN-1225	1-216
GEN-1227	1-216
GEN-1228	4-1015, E9 or E91
GEN-1229	4-1015, E9 or E91
GEN-1230	6-A100 or E95
GEN-1231	4-1035 or E93
GEN-1232	4-1035 or E93
GEN-1233	4-1035 or E93
GEN-1234	6-A100 or E95
GEN-1235	4-1035 or E93
GEN-1240	1-216
GEN-1241	1-216
GEN-1242	1-216
GEN-1243	4-1015, E9 or E91
GEN-1244	4-1015, E9 or E91
GEN-1245	4-1035 or E93
GEN-1246	4-1015, E9 or E91
GEN-1247	4-1035 or E93
GEN-1248	4-1035 or E93
GEN-1249	4-A100 or E95
GEN-1250	1-216
GEN-1251	1-216
AIWA	
AR-101	4-A100 or E95
AR-111	4-A100 or E95
AR-112	4-A100 or E95
AR-280	1-216
AR-350	1-216
AR-360	1-216

MAKE & MODEL	"EVEREADY" BATTERIES
AIWA (Cont.)	
AR-500	1-216
AR-600	1-216
AR-630	1-216
AR-650	1-216
AR-803	6-1035 or E93
AR-804	6-1035 or E93
PM-88	4-1015, E9 or E91
AKKORD	
U-60	4-A100 or E95
ALPHA	
P-30	1-477, 1-A100 or E95
P-78	1-416, 1-1035 or E93
Q-16	1-216
Q-42	1-216
Q-62	1-216
Q-66	4-1015, E9 or E91
Q-67	4-1015, E9 or E91
STR-6	4-1015, E9 or E91
AMBASSADOR	
Super 80	4-1015, E9 or E91
Vanguard	1-246
6 Transistor	1-246
AMERICANA	
FC-60	1-216
FP-861	1-216
HF-624	4-1015, E9 or E91
ST-6X	2-912
FP-80	1-216
AL-65	2-1015, E9 or E91
TP-7	4-1015, E9 or E91
FP-64	1-E177
9TA-370	4-1035 or E93
ST-6Z	3-904, E401 or E90
FM-10	4-1035 or E93
AMERICAN GELOSO	
61SRFG1T StenosTare	10-1015, E9 or E91
TR-711	6-1015, E9 or E91
ANDREA	
P1-63	2-746, 2-482
W69P	2-1015, E9 or E91
ARC	
601	1-467, 2-A100 or E95
ARCADIA	
4B5	2-484, 1-742
ARIA	
5B3	2-484, 1-742
ARISTOCRAT	
—	1-226
ARVIN	
852P	5-1035 or E93, 2-455
854P	5-1035 or E93, 2-455
952P	1-717, 2-455
954P	1-717, 2-455
2598	6-A100 or E95
3588	6-A100 or E95
7595	4-1035 or E93
8565P	1-717, 2-455
8571	1-717, 1-479
8572	1-717, 1-479
8573	1-717, 1-479
8576	1-226
8581	1-707, 1-479
8583	1-707, 1-479
8584	4-A100 or E95
9562P	6-A100 or E95
9574	2-276
9577D	1-226
9594	4-1015, E9 or E91
9595	4-1035 or E93
9598	8-A100 or E95
60R19	4-1035 or E93
60R20 Series	4-1035 or E93
60R30 Series	4-1035 or E93
60R40 Series	4-1015, E9 or E91
60R50 Series	4-A100 or E95
60R60 Series	1-216
61R10	1-206
61R20	1-206
61R30	1-206
61R40	4-1015, E9 or E91

MAKE & MODEL	"EVEREADY" BATTERIES
ARVIN (Cont.)	
61R48	4-1015, E9 or E91
61R49	4-1015, E9 or E91
61R50	4-1035 or E93
61R60 Series	1-206
61R70 Series	1-206
62R09	1-206
62R10 Series	1-206
62R30 Series	4-1015, E9 or E91
62R40 Series	4-1015, E9 or E91
62R59	4-1035 or E93
63R38	1-206
63R58	6-1035 or E93
63R88	6-1035 or E93
63R98	6-1035 or E93
64R00	1-216
64R10	1-216
64R20	4-1015, E9 or E91
64R30	1-206
64R70	6-1035 or E93
65R98	6-1035 or E93
ASTRA	
ST-6	1-216
STR-620	1-226
STR-650	1-216
AURORA	
TPR-806	1-226
TPR-866	1-216
AUTOMATIC	
P-57	2-964, 2-455
TT-528	1-1035 or E93, 1-415
TT-600	1-E233, 1-415
PTR-2M	6-A100 or E95
PTR-3B	6-A100 or E95
PTR-15B	6-A100 or E95
PA-41	6-A100 or E95
PA-52	6-A100 or E95
PA-53	6-A100 or E95
PA-74	6-A100 or E95
P-990	6-A100 or E95
AUTOVOX	
TR-222	4-1015, E9 or E91
Transmobile 3	4-1015, E9 or E91
BAGPIPER (Lawrence Co.)	
SKR101	1-W353, 1-490
BAYLOR	
GYR-15A	1-216
BENDIX	
MRT-9	6-A100 or E95, 3-467
1H01C	6-A100 or E95, 3-467
BROTHERTONE	
6TR-110	4-1015, E9 or E91
TR-45	1-216
TR-6N	1-216
TR-6S	1-216
TR-59	1-216
TR-8L	4-1015, E9 or E91
BUICK (Delco)	
981970	4-E9N
BULOVA	
200 Series	2-A100 or E95, 1-477
220 Series	6-1035 or E93, 1-477
230 Series	6-1035 or E93, 1-477
240 Series	2-A100 or E95, 1-477
250 Series	1-412
260 Series	1-266
270 Series	1-246
280 Series	2-A100 or E95, 1-477
290 Series	1-246
620 Series	1-246
640 Series	1-246
660 Series	4-1015, E9 or E91
670 Series	1-E164
680 Series	1-246
690 Series	1-216
710 Series	1-2713
720 Series	1-246
730 Series	1-246
740 Series	1-E164
780 Series	4-1015, E9 or E91
790 Series	1-216
7800 Series	4-1015, E9 or E91
820 Series	1-216

(1035 formerly 635)

BATTERY REPLACEMENT GUIDE (cont.)

MAKE & MODEL	"EVEREADY" BATTERIES
BULOVA (Cont.)	
830 Series	1-E133, 523 or 333
840 Series	1-E133, 523 or 333
860 Series	4-1035 or E93
870 Series	1-E133, 523 or 333
880 Series	2-1015, E9 or E91
890 Series	1-E133, 333 or 523
BUTOBA	
MT-5	8-A100, E9 or E91
CANDLE	
PTR-21B	1-216
PTR-60	1-216
PTR-61	1-216
PTR-62	1-216
PTR-63	4-1015, E9 or E91
PTR-67	1-216
PTR-68	1-216
PTR-81B	1-216
PTR-83	4-1015, E9 or E91
ATR-60A	4-1015, E9 or E91
PTR-90L	1-216
PTR-100	1-216
PTR-109	1-216
HTR-600	6-A100 or E95
STR-80	4-1015, E9 or E91
WTR-86	1-216
VM-1010	4-1035 or E93
MT-501 (TV)	1-561
CAPEHART	
P-25	2-964, 1-477
1P55	2-964, 1-477
2P56	2-964, 1-477
88P-66BNL	1-752
V66	2-276
11P7	2-276
T6-202	1-216
T6-203	1-216
T7-S200	4-1015, E9 or E91
T8-201	2-1015, E9 or E91
CAPITOL	
ND-309	1-216
CAPRI	
TR500	1-226
TR600	1-226
TR700	1-226
CAVALIER	
4P3	1-756
4P1	1-964, 1-477
4P7	1-717, 1-477
P175C	2-746, 2-482
P-64	2-746, 2-482
966	6-1035 or E93
988	6-1035 or E93
5T60	1-2709
6T60	1-2709
CBS-COLUMBIA	
4P1	1-717, 1-477
5220	1-717, 1-477
5110	2-1035 or E93, 1-477
TR250	1-2314
TR251	1-2314
TR260	2-276
TR261	2-276
TR-1000	6-1015, E9 or E91
400-BGR	1-216
600-GBL	1-216
610	1-216
605-TW	6-1015, E9 or E91
C-615	6-1035 or E93
695-TR	2-1035 or E93 4-A100 or E95
709-GB	4-1015, E9 or E91
CHANNEL MASTER	
6500	4-1035 or E93
6501	1-216
6502	1-216
6503	1-216
6504	1-216
6505	4-1035 or E93
6506	4-1015, E9 or E91
6507	1-1015, E9 or E91
6508	1-216
6509	1-216
6510	4-1015, E9 or E91
6511	4-A100 or E95

MAKE & MODEL	"EVEREADY" BATTERIES
CHANNEL MASTER (Cont.)	
6512	4-1015, E9 or E91
6514	4-1015, E9 or E91
6515	4-1035 or E93
6516	1-216
6517	4-1015, E9 or E91
6518	4-1035 or E93
6519	4-1035 or E93
6520	4-A100 or E95
6521	4-A100 or E95
6523	4-1035 or E93
6524	4-1035 or E93
6527	1-216
6528	3-A100 or E95
6550	4-A100 or E95
CLAIRTONE	
C-1000 (TV-Remote Control)	1-E115
CXR (TV-Remote Control)	1-E115
S-1000 (TV-Remote Control)	1-E115
S-1001 (TV-Remote Control)	1-E115
COLUMBIA	
1807	4-1015, E9 or E91
1825	5-A100 or E95
1865	1-216
COMMODORE	
6TS3	1-216
CONCORD	
T-9	3-1015, E9 or E91
CONSTANT	
CBT-10	8-1015, E9 or E91
STC-165	6-A100 or E95
6T-160	1-216
6T-170	1-216
6T-180	1-216
6T-220	1-216
6T-250	1-216
6T-270	1-216
6T-300	1-216
6T-330	4-1015, E9 or E91
8T-260	1-216
8T2-820	4-1015, E9 or E91
8T3-18	4-1015, E9 or E91
10T2-1200	4-1035 or E93
TPC-400	6-A100 or E95
TPC-500	6-A100 or E95
TP2-810	6-1015, E9 or E91
TP2-830	6-A100 or E95
CONTINENTAL	
150	1-216
160	1-226
MB-7	6-1015, E9 or E91
PR-421 (Phono only)	4-1035 or E93
M-431	1-A100 or E95, 1-416
M-650	1-A100 or E95, 1-477
P50	1-A100 or E95, 1-477
SW-7	6-1015, E9 or E91
TFM-1150	6-1035 or E93 or 1-2356
TR-100	1-216
TR-182	1-216
TR-200	1-216
TR-208	1-216
TR-215	4-A100 or E95
TR-300	1-216
TR-394	1-216, 2-1035 or E93
TR-570	6-1015, E9 or E91
TR-622	1-216
TR-630	4-1015, E9 or E91
TR-632	1-216
TR-652	1-216
TR-660	1-216
TR-661	1-216
TR-682	1-216
TR-683	1-216
TR-668	1-216
TR-720	4-1035 or E93
TR-751	1-216
TR-801	4-1015, E9 or E91
TR-823	4-A100 or E95
CORONADO (Gamble)	
9880	2-964, 1-437
9882	1-717, 1-479
9883	1-717, 1-479

MAKE & MODEL	"EVEREADY" BATTERIES
CORONADO (Gamble) (Cont.)	
9890	1-239
9893	4-A100 or E95
9895	3-1015, E9 or E91
9896	3-1015, E9 or E91
9897	3-A100 or E95
9898	6-1035 or E93
9899	1-E133, 523 or 333
9900	1-216
9902	1-216
9903	6-1035 or E93
9904	4-A100 or E95
9905	6-1035 or E93
9906	3-A100 or E95
9907	6-1015, E9 or E91
9908	4-1015, E9 or E91
9909	4-1015, E9 or E91
9914	1-206
9915	4-1015, E9 or E91
9917	1-523, 333 or E133
CORONET	
STR-221	1-216
STR-222	1-216
STR-333	1-216
CRAIG	
300	4-1035 or E93
TR401	4-1015, E9 or E91
TR403	10-1015, E9 or E91
TR505	6-A100 or E95
TR602	4-1035 or E93
CREST	
IV	1-216
CRESTLINE	
ATR-210	1-A100 or E95, 1-416
CROSLEY	
F115S	1-756
JM8BK	1-E233, 1-415
P or T50	1-717, 2-455
P or T60	1-717, 2-455
JM8WE	1-E233, 1-415
CROWN	
M600TR	1-226
601	4-1015, E9 or E91
PR-530	1-A100 or E95, 1-416
PR-535C	1-A100 or E95, 1-416
TR-4S	1-216
TR-6S	1-216
TR-7S	3-1015, E9 or E91
TR-11	1-216
TR-124	6-1035 or E93
TR-333	1-216
TR-400	1-226
TR-555	1-216
TR-610	4-1015, E9 or E91
TR-620	1-226
TR-666	1-216
TR-670	1-216
TR-680	2-1015, E9 or E91
TR-750	4-1015, E9 or E91
TR-777	3-1015, E9 or E91
TR-800	4-1015, E9 or E91
TR-810	1-216
TR-820	1-216
TR-830	1-216
TR-900R	4-1015, E9 or E91
TR-999	2-1015, E9 or E91
TRP-8	4-A100 or E95
TRP-10	6-A100 or E95
TRP-20	6-A100 or E95
TRD-15	6-A100 or E95
STP-30	6-A100 or E95
STP-35R	6-A100 or E95
6TR-8	4-1015, E9 or E91
8-Transistor	8-1015, E9 or E91
HT-8	6-A100 or E95
TRF-1000	4-1035 or E93
TRF-1100	6-1015, E9 or E91
TRF-1200	6-1035 or E93
DELMONICO	
TRS-6	1-216
TR7	1-216
7TA-2	4-A100 or E95
7TH-1	4-A100 or E95
8B-2	1-216
10M53	4-1015, E9 or E91
10TA1	4-1015, E9 or E91

MAKE & MODEL	"EVEREADY" BATTERIES
DELMONICO (Cont.)	
9F2	4-1035 or E93
TRN7C	1-216
5T-30 (TV)	1-561
4T-20 (TV)	3-563
DELOPHON	
—	2-A100 or E95, 1-457
DE WALD	
415	1-742, 2-738
F-405	1-759
G-408	2-964, 1-477
H-527	1-717, 1-477
K-701	1-276
K-702	2-276
K-544	1-246
L-414	1-266
L-546	1-246
L-618	1-276
L-703	1-276
M-414	1-266
DUMONT	
RA-354	1-717, 1-437
1210	6-1035 or E93
RA-902	6-1035 or E93
900	4-1015, E9 or E91
TV-Remote Control 1961	1-216
TV-Remote Control 1962	1-216 or E163
DUO COM	
100	8-1015, E9 or E91
EAGLE	
66-C	1-216
TR-44	1-216
TR-77	1-216
TR-84	1-216
UM-34	4-1015, E9 or E91
1806	1-216
1807	3-1015, E9 or E91
1808	3-1015, E9 or E91
1840	3-1015, E9 or E91
TR-901	4-1015, E9 or E91
STR-935M	4-1015, E9 or E91
UM-36	3-1015, E9 or E91
ELECTRONIC (B&B Electronics)	
P-56	2-964, 1-477
P-76	2-964, 1-477
EMERSON	
801	2-964, 1-477
790	1-726, 1-490
754	1-756
830B	1-717, 1-467
840	1-717, 1-467
842	1 or 2-276
842A	1 or 2-276
843	1-744, 1-467
844	2-276
847	2-276
848	1-717, 1-467
849	1-226
850	2-964, 1-477
855	2-276
856	1-E233, 1-415
PE-15	1-E233, 1-415
838	1-E233, 1-415
833	1-717, 1-467
868	2-276
869	2-276
878B	1-717, 1-467
879B	1-717, 1-467
888	4-1015, E9 or E91
999	1-216
555	4-1015, E9 or E91
"Transtimer I" 888	4-1035 or E93
(Clock)	1-E9
"Transtimer II" 888	4-1035 or E93
(Clock)	1-A100 or E95
911	4-1015, E9 or E91
977	4-1015, E9 or E91
988	4-1015, E9 or E91
707	1-E133, 523 or 333
Wondergram TV-Remote Control 1961	4-1035 or E93 1-216

(1035 formerly 635)

BATTERY REPLACEMENT GUIDE (cont.)

MAKE & MODEL	"EVEREADY" BATTERIES
EMERSON (Cont.)	
TV-Remote Control 1962	1-E163
808	1-E133, 523 or 333
880	1-E133, 523 or 333
990	4-1015, E9 or E91
ETERNA	
C-96	1-216
ET-97	1-216
ET-444	1-216
P-55	1-A100 or E95, 1-416
ET-V7	1-216
E-6	4-1015, E9 or E91
E-10	4-1015, E9 or E91
EXCEL	
MHT-6	1-226
6T-2	1-226
T-211	1-A100 or E95, 1-416
XL-3	1-A100 or E95, 1-467
XL-45	1-A100 or E95, 1-467
FADA	
P86	3-A100 or E95, 1-467
FEN-TONE	
1851	1-A100 or E95, 1-477
1852	1-1035 or E93, 1-415
Mark 2	4-A100 or E95
FIRESTONE	
4-C-26	2-964, 2-455
4-C-27	1-717, 1-477
4-C-29	1-E233, 1-415
4-C-30	1-753
4-C-31	2-1035 or E93, 1-477
4-C-32	1-717, 1-477
4-C-33	6-A100 or E95
4-C-34	6-A100 or E95
4-C-35	1-756
4-C-36	6-1015, E9 or E91
4-C-37	6-1015, E9 or E91
4-C-38	6-A100 or E95
4-C-40	6-1015, E9 or E91
4-C-41	2-1035 or E93, 1-477
4-C-42	6-1015, E9 or E91
4-C-43	6-1015, E9 or E91
4-C-44	6-1015, E9 or E91
4-C-45	6-1015, E9 or E91
4-C-46	1-216
4-C-47	1-216
4-C-48	2-1015, E9 or E91
4-C-49	4-1035 or E93
4-C-50	5-1015, E9 or E91
4-C-51	6-1015, E9 or E91
4-C-52	1-216
4-C-53	2-1015, E9 or E91
4-C-54	2-1015, E9 or E91
4-C-55	3-1035 or E93
4-C-56	4-1035 or E93
4-C-57	4-1035 or E93
4-C-59	2-1015, E9 or E91
4-C-61	1-216
4-C-64	2-1015, E9 or E91
4-C-65	3-1015, E9 or E91
4-C-66	4-1035 or E93
4-C-67	6-1015, E9 or E91
4-C-68	4-A100 or E95
4-C-69	6-A100 or E95
FISHER	
TR-1	1-239
FIVE STAR	
1495	1-1035 or E93, 1-415
1832	1-1035 or E93, 1-415
FLEETWOOD	
NTR-6H	6-A100 or E95
NTR-8H	6-A100 or E95
NTR-66	6-1015, E9 or E91
NTR-120	1-216
NTR-150	1-216
NTR-260	1-A100 or E95, 1-416
NTR-600	1-A100 or E95, 1-457
NTR-707	4-1035 or E93
NTR-800	1-216
1001 to 1011	1-E163
NTR-10H	6-A100 or E95
FOUNTAIN	
FR-501	4-1035 or E93
FR-505	4-1035 or E93

MAKE & MODEL	"EVEREADY" BATTERIES
FUJI	
T-3	1-1015, E9 or E91
T-6	2-1015, E9 or E91
T-23	1-216
T-24	1-216
T-25	1-216
T-26	1-216
T-27	1-216
T-28	1-216
FUJI DENKI	
TRB-601	1-216
TRB-611	1-216
TRS-701	1-216
FUJIYA	
TR-102	4-1015, E9 or E91
TRP-725	6-A100 or E95
STP-836	6-A100 or E95
FUTURA	
111	4-A100 or E95
222	4-A100 or E95
250	4-A100 or E95
366	2-904, E90 or E401
1051	4-A100 or E95
400 Series	2-A100 or E95, 1-216
GARFIELD, OLIVER (Wrist Radio)	
STP-836	6-A100 or E95, 5-E625
GENERAL	
5MA-408G	4-A100 or E95
6GA-141	1-216
6G-709	1-216
6G-770	1-216
6G-780	1-216
6G-819	1-216
7G-105	4-A100 or E95
7GA-242	6-A100 or E95
7HA-304B	6-A100 or E95
7HA-530	6-1035 or E93
8GA-601	4-1015, E9 or E91
10GF-152	4-1015, E9 or E91
6GA-128L	1-216
TG-093	1-216
8GA-807	3-A100 or E95
5MA-345	4-A100 or E95
8HA-209	6-A100 or E95
8HA-192	4-A100 or E95
9GA-131A	4-1035 or E93
XD-15	6-1035 or E93
GENERAL ELECTRIC	
660	2-A100 or E95, 1-467
661	2-A100 or E95, 1-467
675	1-239
676	1-239
637	2-964, 1-437
646	2-964, 1-437
647	2-964, 1-437
665	2-964, 1-437
666	2-964, 1-437
667	2-964, 1-437
670	1-717, 1-479
671	1-717, 1-479
672	1-717, 1-479
673	1-717, 1-479
677	1-239
678	1-239
680	2-A100 or E95, 1-467
681	2-A100 or E95, 1-467
682	2-A100 or E95, 1-467
P671	1-479, 1-717
P674	1-479, 1-717
P710	4-1015, E9 or E91
P711	4-1015, E9 or E91
P715	2-1015, E9 or E91
P716	2-1015, E9 or E91
P720	4-A100 or E95
P721	4-A100 or E95
P725	4-A100 or E95
P726	4-A100 or E95
P700	2-964, 1-437
P701	2-964, 1-437
P725B	3-A100 or E95
P726B	3-A100 or E95
P735	1-717, 1-479
P735A	1-717, 1-479
P736	1-717, 1-479
P745	3-1015, E9 or E91

MAKE & MODEL	"EVEREADY" BATTERIES
GENERAL ELECTRIC (Cont.)	
P746	3-1015, E9 or E91
P750	3-A100 or E95
P750A	3-A100 or E95
P755	1-266
P760	4-A100 or E95
P761	4-A100 or E95
P765	2-1015, E9 or E91
P766	2-1015, E9 or E91
P766A	2-1015, E9 or E91
P674	1-717, 1-479
P770	3-A100 or E95
P771	3-A100 or E95
P776	3-A100 or E95
P777	3-A100 or E95
P780	6-A100 or E95
P785	2-1015, E9 or E91
P786	2-1015, E9 or E91
P787	2-1015, E9 or E91
P790	1-226
P791	1-226
P795	4-A100 or E95
P796	4-A100 or E95
P797	4-A100 or E95
P800	4-1015, E9 or E91
P805	1-266
P806	1-266
P807	1-266
P808	1-266
CT455 (Clock)	3-1015, E9 or E91
T145	1-A100 or E95
SB03XE6	3-A100 or E95
Voice Director (R70VCD)	1-E165
P809	1-266
P-810	1-266
P811	1-266
P815	1-266
P816	1-266
P820	2-1015, E9 or E91
P821	2-1015, E9 or E91
P822	2-1015, E9 or E91
P830	1-226
P831	1-226
P832	1-226
P835	6-1035 or E93
P840	6-1035 or E93
P850	1-E133, 523 or 333
P851	1-E133, 523 or 333
P860	4-1015, E9 or E91
P865	6-A100 or E95
P870	3-1035 or E93
P875	6-1035 or E93
P880	4-A100 or E95
P881	4-A100 or E95
P885	1-333, 523 or E133
P8071	1-226
P8081	1-226
P8251	1-E133, 523 or 333
P8261	1-E133, 523 or 333
P8503	1-333, 523 or E133
P8513	1-333, 523 or E133
P8522	1-E133, 523 or 333
P8532	1-E133, 523 or 333
P8851	1-E133, 523 or 333
P925	4-1035 or E93
P930	4-1035 or E93
P955	4-1035 or E93
P9051	1-E133, 523 or 333
P9001	1-226
P9011	1-226
P9101	2-1015, E9 or E91
P9111	2-1015, E9 or E91
P9151	2-1015, E9 or E91
P9161	2-1015, E9 or E91
Voice Commander	4-E91, 2-E93, 1-413, 2-416
M600 Series	1-216
M700 Series	1-216
R600 Series	1-216
R700 Series	1-216
R832 Series	1-226
GLOBAL	
GR-3T6	1-216
GR-5T6	1-216
GR-606	6-1035 or E93
GR-607	1-216
GR-651	4-A100 or E95
GR-711	1-216
GR-722	4-1015, E9 or E91
GR-900	1-216

MAKE & MODEL	"EVEREADY" BATTERIES
GLOBAL (Cont.)	
GRC-715	3-1015, E9 or E91
GFM-931	4-1015, E9 or E91
GOLDEN SHIELD	
2300	1-246
2400	1-246
2500	1-246
2600	1-246
2700	1-246
2750	1-246
2800	1-2731
2900	1-2731
3100	6-1035 or E93
3200	6-1035 or E93
3100 } Late 3200 } Models	1-2356, 1-635 or E93
3500	1-216
3608	1-216
3609	1-216
7000	4-1015, E9 or E91
7010	1-333, 523 or E133
7020	1-216
7030	6-1015, E9 or E91
7040	4-1015, E9 or E91
7050	1-246
7058	1-216
7060	4-1015, E9 or E91
7070	4-1035 or E93
7080	4-1035 or E93
7090	2-1015, E9 or E91
7137	4-1015, E9 or E91
7186	1-216
7209	1-216
1200	4-1035 or E93
GRAND PRIX	
GP-21	1-216
GP-901	4-1015, E9 or E91
GP-803	4-1015, E9 or E91
GP-8A	4-1015, E9 or E91
HR-22	1-216
GRUNDIG-MAJESTIC	
Concert Boy 57	1-A100 or E95, 1-490
15-CX-601	4-A100 or E95, 2-1015, E9 or E91
Teddy Boy Ambassador	6-A100 or E95
Transworld Petite	6-A100 or E95
Transworld Junior	4-1015, E9 or E91
Transworld Starlet	1-276
	2-904, E90 or E401
Miniboy	1-216
Roadmaster	6-A100 or E95
HALLICRAFTERS	
TW-600	1-757
TW-55	1-A100 or E95, 2-415
5R42	1-717, 1-490
5R41	1-717, 1-490
TW100	2-A100 or E95, 1-477
TW101	2-A100 or E95, 1-477
TW102	2-A100 or E95, 1-477
TR88	4-1035 or E93
TW-202	1-717, 1-477
TW-203	1-717, 1-477
TW-200	1-717, 1-477
TW-201	1-717, 1-477
Littlefone CB-4	1-228
HARPERS	
GK-301	1-A100 or E95, 1-416
GK-200	4-1015, E9 or E91
GK-501	1-A100 or E95, 1-416
GK-600	2-1015, E9 or E91
GK-631	1-216
TR-208	1-216
TR-221	1-216
2TP-110	2-912
HARTMAN	
TR6-102	1-216
TR6-103	1-216
TR6-105	1-E177
HEATH	
XR-1	6-A100 or E95
XR-2	6-A100 or E95

(1035 formerly 635)

BATTERY REPLACEMENT GUIDE (cont.)

MAKE & MODEL	"EVEREADY" BATTERIES
HEATH (Cont.)	
TCR-1	6-1015, E9 or E91
(Clock)	1-E9
GC-1	8-A100 or E95
(Mohican)	
GWW-21	1-216
GWW-30	1-246
GE-131	1-2356
GR-151	1-2356
GWW-31	1-246
HI-DELITY	
PT-600	4-1015, E9 or E91
TS-650	1-226
4D-2006	1-A100 or E95, 1-477
5TB-1	1-216
7TA-1	4-1015, E9 or E91
TH-2770	4-A100 or E95
TS-650	1-216
TS-651	1-216
HILTON	
TR2	1-216
TR604	1-E177
TR6A	1-216
TR660	1-216
TR81	1-216
TR8A2	1-216
ATR80A	1-216
NTR800	1-216
T822	4-1015, E9 or E91
GFM931	4-1015, E9 or E91
HT1102	4-1035 or E93
NTR6G	6-A100 or E95
3BT82	6-A100 or E95
X800	3-1035 or E93
HITACHI	
TH-621	1-216
TH-627	1-216
TH-664	1-216
TH-666	1-216
TH-667	4-1035 or E93
WH-667	4-A100 or E95
WH-720	6-1015, E9 or E91
WH-761	1-216
WH-822	4-1015, E9 or E91
WH-825	3-1015, E9 or E91
XH-1500	6-1035 or E93
TH-600	2-1015, E9 or E91
TR-650	1-216
TH-660	2-1015, E9 or E91
TH-759	3-1015, E9 or E91
W-734	4-1015, E9 or E91
(Clock)	1-A100 or E95
WH-817	3-1035 or E93
WH-829	3-1015, E9 or E91
WH-859	3-1035 or E93
HOFFMAN	
402 Series	1-1035 or E93, 1-415
P410	4-1035 or E93
706 Series	1-E233
707 Series	1-216
708 Series	4-1015, E9 or E91
709 Series	3-1015, E9 or E91
711	6-1015, E9 or E91
M1367 (TV Remote Control)	1-E163
LF-022	1-216
WR-3953	1-E163
716	4-1035 or E93
718	6-1015, E9 or E91
719	3-1015 or E91
724	1-216, 1-A100 or E95
725	6-1015, E9 or E91
727	1-216
728	1-216
729	4-1035 or E93
734	6-1015, E9 or E91
(Tape)	and 3-1035 or E93
HOLIDAY	
BJB-6	1-226
CC6P	2-1015, E9 or E91
OL666	4-1015, E9 or E91
Q62M	1-216
Q68MP	2-1015, E9 or E91
RR6P	3-1015, E9 or E91
STR6	4-1015, E9 or E91
STR-7P	4-1035 or E93
H660	4-1015, E9 or E91
M6MP	2-1015, E9 or E91

MAKE & MODEL	"EVEREADY" BATTERIES
HOLIDAY (Cont.)	
M4M	1-216
Q42M	1-216
Q62MP	2-1015, E9 or 91
STP-	1-1035 or E93, 1-416
ST190	6-1015, E9 or E91
8GA601	4-1015, E9 or E91
HF613	3-1015, E9 or E91
HF801	6-1015, E9 or E91
NT71	4-1015, E9 or E91
HA-82	4-1015, E9 or E91
HF624	4-1015, E9 or E91
HA77	6-1035 or E93
HA861	1-216
HB6H	4-A100 or E95
HF601	1-216
HF624	4-1015, E9 or E91
HF646	1-216
HP70	1-E177
HT881	4-1015, E9 or E91
HW635	1-216
HW820	4-1015, E9 or E91
OLT6	4-1015, E9 or E91
818	6-1015, E9 or E91 & 3-1035 or E93
HONEYTONE	
G606	1-216
G607	1-E177
8TP-412	3-1015, E9 or E91
FR601	1-216
KTF-102G	4-1035 or E93
UN2	12-1015, E9 or E91
604	1-216
ITT (International Tel. & Tel.)	
600	1-216
615	1-216
628	1-216
631	1-216
721	4-1035 or E93
(Clock)	1-935
731	1-216
871	1-216
881	4-1035 or E93
1000	4-1015, E9 or E91
1005	4-A100 or E95
1011	6-1035 or E93
JEFFERSON-TRAVIS (Emerson)	
JT-E212	1-216
JT-F211	1-216
JT-G104	4-1015, E9 or E91
JT-G200	1-216
JT-G204	4-1015, E9 or E91
JT-H105	4-1015, E9 or E91
JT-H210	1-216
JEWEL	
(Revised)	1-964, 1-477
AR-641	1-216
JOHNSON-VIKING	
Personnel Messenger (242-101-1)	8-1015, E9 or E91
KNIGHT (Allied Radio)	
6X-145	1-216
730	1-964, 1-467
83Y262	1-226
83Y771	1-246
83Y922	1-216
KOWA	
KTF-1	4-1035 or E93
KT-31	1-216
KT-62	1-216
KT-63	1-216
KT-64	1-216
KT-66	1-216
KT-67	1-216
KT-68	1-216
KTS-1	4-1015, E9 or E91
KEC-4	6-1035 or E93
KEC-5	6-1035 or E93
KEC-6	6-1035 or E93
KT-81	1-216
KT-91	2-1015, E9 or E91
KOYO	
KR-6TS	4-1015, E9 or E91

MAKE & MODEL	"EVEREADY" BATTERIES
KOYO (Cont.)	
KR-6TS33	1-216
KR-6TS35	1-216
KR-6TS40	1-216
KR-6TS43	1-216
RP-1	6-A100 or E95
RP-2Aq	4-1035 or E93
RP-3	
(Radio Phono)	6-A100 or E95
RP-200	4-1035 or E93
(Phono Radio)	
KR-82	4-1015, E9 or E91
KR-91K	4-1035 or E93
KR-101	4-1015, E9 or E91
KR-888	4-1015, E9 or E91
LAFAYETTE	
FS-91	2-1015, E9 or E91
FS-92	4-1035 or E93
FS-93	4-1035 or E93
FS-112	1-216
FS-129	4-1015, E9 or E91
FS-200	1-216
FS-204	1-216
FS-223	2-1015, E9 or E91
FS-226	1-216
FS-230	1-216
FS-119	4-1035 or E93
FS-124	3-1015, E9 or E91
FS-225	6-1015, E9 or E91
FS-235	2-1015, E9 or E91
FS-238	4-1015, E9 or E91
RK-120	6-1015, E9 or E91
HE-29	8-1015, E9 or E91
LINCOLN (Allied Radio)	
L-640	1-216
L-4016	4-1035 or E93
LINMARK	
PR-100	1-A100 or E95, 1-457
T-40	1-216
T-60	1-216
T-61	1-216
T-62	1-216
T-63	1-216
T-64	1-216
T-80	2-1015, E9 or E91
LITTLE PAL	
—	1-1035 or E93, 1-415
LITTLE SUN	
PR-537	1-A100 or E95, 1-416
MACO	
T-16	4-1015, E9 or E91
AB-100	1-216
AB-175	4-1035 or E93
AB-210	4-1035 or E93
AB-210U	6-1035 or E93
AB-591	6-A100 or E95
"Midgette"	1-216
MAGNAVOX	
AM-2	1-E233
AM-5	1-E233
AM-22	1-216
AM-23	1-216
AM-24	4-A100 or E95
AM-60	1-216
AT-61	1-2356
AM-80	1-216
AM-100	1-246
AM-62	1-206
AM-64	4-1015, E9 or E91
AM-84	4-1015, E9 or E91
AM-85	3-1035 or E93
FM-90	6-1035 or E93
FM-93	4-1015, E9 or E91
FM-95	1-2761
FM-96	1-2761
FM-97	1-2761
WT-101	2-226
MAJESTIC	
4L1	2-964, 1-437
5M1	1-964, 1-477
4P1	2-A100 or E95, 1-490 & 4-1035 or E93 (Phono Motor)

MAKE & MODEL	"EVEREADY" BATTERIES
MARVEL	
6YR-01A	4-1015, E9 or E91
6YR-02	1-216
6YR-05C	1-216
6YR-10A	1-216
6YR-15A	1-216
3RP-12	4-A100 or E95
(Record Player)	
6YR-19	4-1035 or E93
10FM-34A	4-1035 or E93
8YR-38	6-1015, E9 or E91
9FM-38	3-1015, E9 or E91
8YR-808	1-216
FM-1002	4-1035 or E93
MITCHELL	
1296	2-964, 1-447
1297	2-964, 1-477
1287	1-753
1101	1-412
1102	1-412
1103	1-412
MITSUBISHI	
6X-140	1-216
6X-300	1-216
7X-370	1-226
7X-540	4-1015, E9 or E91
7X-550	1-226
AR-820	4-1015, E9 or E91
TR-290	4-A100 or E95
7X-575	4-1015, E9 or E91
7X-588	3-1015, E9 or E91
8X-366	3-1015, E9 or E91
9X-900	1-216
MMA	
6TP-317	2-1015, E9 or E91
TF-52	4-A100 or E95
600, 601, 602	1-216
8TP-412	3-1015, E9 or E91
8TP-416	2-1015, E9 or E91
8TP-802M	4-1035 or E93
8TP-905	4-1035 or E93
F-140	4-1015, E9 or E91
MORROW	
VP-100	1-216
MOTOROLA	
63LSS	1-756
55B	1-717, 1-479
55L	1-717, 1-479
55M	1-717, 1-479
55J	2-964, 1-479
65L	1-756
45P	1-1035 or E93, 1-415
56T	1-216
56B	1-717, 1-479
56L	1-717, 1-479
56M	1-717, 1-479
66T	4-1015, E9 or E91
66L	1-276, 1-479
67T	4-1015, E9 or E91
76T	1 or 2-276
5P21	1-707, 1-479
5P22	1-707, 1-479
5P23	1-707, 1-479
5P31	1-707, 1-479
5P32	1-707, 1-479
5P33	1-707, 1-479
6P25	1-276, 1-479
6P34	1-276, 1-479
6X28	4-1015, E9 or E91
6X31	4-1015, E9 or E91
6X32	4-1015, E9 or E91
6X39A	4-1015, E9 or E91
7X23	4-1015, E9 or E91
7X24	4-1015, E9 or E91
7X25	4-1015, E9 or E91
8X26	4-1015, E9 or E91
L12	6-1035 or E93
L13	6-1035 or E93
L14	6-1035 or E93
X11	1-216
X12	4-1015, E9 or E91
X14	1-226
X15	1-226
X16	4-1015, E9 or E91
X17	4-1015, E9 or E91
XT18	2-276
X19	4-1015, E9 or E91
L20	6-1035 or E93

(1035 formerly 635)

BATTERY REPLACEMENT GUIDE (cont.)

MAKE & MODEL	"EVEREADY" BATTERIES
MOTOROLA (Cont.)	
X21	3-904, E90 or E401
X23	1-206
X24	1-206
X25	1-226
X28	4-1015, E9 or E91
X29	4-1015, E9 or E91
XT30	2-276
X31	4-1035 or E93
X35	1-206
X36	1-226
X37	1-226
X38	4-1015, E9 or E91
X39	4-1015, E9 or E91
X40	4-1015, E9 or E91
X41	4-1015, E9 or E91
AX4	1-2761
AX5	1-2761
X26	4-1015, E9 or E91
X27	1-226
X34	1-206
X42E	2-226
CX1E	1-226
(Clock)	1-1015, E9 or E91
MUNTZ	
E23RCB (TV Remote Control)	1-E163
NANAOLA	
NR-5P-51	1-A100 or E95, 1-477
6TP-101	4-1015, E9 or E91
6TP-102	1-216
6TP-103	1-216
6TP-104	1-216
6TP-106	1-216
6TP-107	1-216
6TP-112	1-216
6TP-502	1-216
6TP-503	1-216
8TP-602	1-216
NT-100	6-1015, E9 or E91, 1-216
GTP-205	1-216
GTP-206	1-216
GTP-207	1-216
STP-405	2-1015, E9 or E91
11TF-52	4-A100 or E95
8TP-67	4-A100 or E95
8TP-802	4-1035 or E93
8TP-902	4-1035 or E93
NATIONAL	
AB-100	1-216
AB-201	4-1035 or E93
T-12	2-1015 E9 or E91
T-13	1-216
T-41	4-1015, E9 or E91
T-51	4-1015, E9 or E91
T-80	4-A100 or E95
T-90	6-1035 or E93
NEC	
NT-61	1-216
NT-79	4-1015, E9 or E91
NT-86	4-1035 or E93
NT-88	4-1015, E9 or E91
NT-620	1-216
NT-625	1-216
NT-640	1-E164
NT-730	1-216
N-71	6-A100 or E95
N-82	6-A100 or E95
RMT-300	1-216
NT-6M21	1-216
NT-7P21	4-1015, E9 or E91
NT-7P22	3-1035 or E93
NT-8P12	4-1015, E9 or E91
NTP-901	4-1015, E9 or E91
NT-7H11	6-A100 or E95
NTF-9M21	1-216
NT-910	4-A100 or E95
NTF-1001	6-1035 or E93
NT-8037	6-A100 or E95
NT-8038	6-A100 or E95
NIPCO	
60TM	1-216
200PM	1-216
300T	4-1015, E9 or E91
400T	4-1015, E9 or E91
707	1-216

MAKE & MODEL	"EVEREADY" BATTERIES
NORDMENDE	
Condor 1/608US	6-1035 or E93
NORELCO (No. Amer. Phillips)	
L0X95T	3-1015, E9 or E91
L1X75T	4-1015, E9 or E91
L2X05T	4-1015, E9 or E91
L2X97G	4-1015, E9 or E91
L3X09T	4-A100 or E95
L3X71T	4-A100 or E95
L3X78T	6-A100 or E95
L3X86T	6-A100 or E95
L3X88T	6-A100 or E95
L3X95T	4-A100 or E95
L4X05T	4-A100 or E95
L4X95T	6-A100 or E95
L4X98T	6-A100 or E95
AG4049 Series	4-A100 or E95
L2X28T	4-1015, E9 or E91
L5X28T	6-A100 or E95
OLDSMOBILE (Delco)	
989172	4-E9N
OLSON	
KB-72	1-216
RA-315	1-216
RA-347	1-216
RA-355	1-A100 or E95, 1-416
RA-356	3-A100 or E95
RA-359	4-1035 or E93
RA-371	1-216
RA-373	1-216
RA-386	1-216
RA-387	8-1015, E9 or E91
RA-419	1-216
RA-421	4-1035 or E93
S-395	3-A100 or E95
RA-537	8-1015, E9 or E91
RA-493	1-216
OLYMPIC (Hamilton)	
447	2-276
450	1-A100 or E95, 1-477
450V	1-A100 or E95, 1-477
666	1-226
460	1-A100 or E95, 1-477
461	1-A100 or E95, 1-477
766	4-1015, E9 or E91
770	1-216
771	4-1015, E9 or E91
768	1-226
777	1-216
778	1-216
779	1-216
808	6-1035 or E93
859	4-1015, E9 or E91
860	4-1015, E9 or E91
781	1-216
CT999	1-216
1100	4-1035 or E93
1200	4-1035 or E93
OMEGA	
KR-453	1-1035 or E93, 1-415
ONKYO	
TR-10	4-A100 or E95
TR-50	1-216
TR-110	1-226
TR-710	1-216
TCR-501	6-1015, E9 or E91
7TR-800	4-1015, E9 or E91
TCR-111	8-1015, E9 or E91
10TR-502	6-1035 or E93
ORION	
2BTR	4-1015, E9 or E91
2BT8	4-1015, E9 or E91
3BT8	6-A100 or E95
T805	4-A100 or E95
T833	4-1015, E9 or E91
T834	6-1035 or E93
TLM8	4-1015, E9 or E91
TR604	1-216
TR605	4-1015, E9 or E91
TR705	2-1015, E9 or E91
T822	4-1015, E9 or E91
T835	4-A100 or E95
TR8A2	1-216
TRFAS	4-A100 or E95
3BT82	6-A100 or E95

MAKE & MODEL	"EVEREADY" BATTERIES
ORION (Cont.)	
TR646	2-1015, E9 or E91
FM10	4-1015, E9 or E91
FA-101	4-1015, E9 or E91
TR6A8	1-216, 2-1015, E9 or E91
TR8A7	1-216, 2-1015, E9 or E91
TR8A8	1-216, 2-1015, E9 or E91
OSBORNE ELECTRONICS RADIO CORP.	
2-Way Radio	8-904, E401 or E90
PACKARD BELL	
441	1-713, 1-467
4RB1	1-1035 or E93, 1-415
6RT1	1-246
6RT2	6-1015, E9 or E91
6RT4	1-216
6RT5	1-216
6RT6	1-216
6RT7	1-216
8RT2	4-A100 or E95
9RT2	4-1015, E9 or E91
8RT3	1-216
8RT4	1-216
PANASONIC	
RG-2	6-A100 or E95
T-28	4-1035 or E93
T-30	4-A100 or E95
T-92	1-E133, 523 or 333
T-7	1-216
T-13	1-216
T-22	4-1035 or E93
T-35	4-1035 or E93
T-41	4-1015, E9 or E91
T-50	4-1015, E9 or E91
T-53	1-216
T-59	1-216
T-66	4-A100 or E95
T-70	4-1035 or E93
DT-495	4-1035 or E93
T-41	4-1015, E9 or E91
T-44	3-A100 or E95
T-50AA	4-1015, E9 or E91
T-53	1-216
T-67	4-1035 or E93
T-70	4-1035 or E93
T-93	2-1015, E9 or E91
AB-175	4-1015, E9 or E91
T-81	4-1015, E9 or E91
T-89	6-1035 or E93
T-101	4-A100 or E95
T-301	4-1015, E9 or E91
T-601	1-216
T-770	4-A100 or E95
T-801	4-1015, E9 or E91
T-802	4-1035 or E93
T-808	4-1015, E9 or E91
T-1	8-1015, E9 or E91
T-98	1-216
Mitey-5 (TV)	1-561
Mitey-9 (TV)	1-561
J. C. PENNEY	
629	4-1035 or E93
PERMA POWER	
S-100	2-731
PETITE	
NTR-800	1-216
PHILCO	
T-51	4-E640
T52	4-1015, E9 or E91
T62	2-1015, E9 or E91
T66	2-1015, E9 or E91
T70	2-1015, E9 or E91
T74	4-1035 or E93
T76	2-A100 or E95
H-691	1-717, 1-479
T-802	4-A100 or E95
T-901	4-A100 or E95
H-2010	1-560
B-650	2-964, 1-437
B-652	2-964, 1-437
C-660	2-964, 1-437

MAKE & MODEL	"EVEREADY" BATTERIES
PHILCO (Cont.)	
C-662	2-964, 1-437
C-663	2-964. 1-437
C-666	2-1035 or E93, 1-756
C-667	2-1035 or E93, 1-756
C-671	1-717, 1-479
C-673	1-717, 1-479
C-676	1-717, 1-479 or 1-495
D-655	2-964, 1-437
D-661	2-964, 1-437
D-664	2-964, 1-437
D-665	2-964, 1-437
E-670	1-717, 1-479
E-672	1-717, 1-479
E-675	1-717, 1-479
E-676	1-717, 1-479
T-7	2-A100 or E95
G-681	1-717, 1-479
T-3	2-E630
T-4	4-1015, E9 or E91
T-5	4-1015, E9 or E91
T-500	4-1015, E9 or E91
T-6	3-A100 or E95
T-7X	2-A100 or E95
T-700	4-A100 or E95
T-701	4-A100 or E95
T-800	4-A100 or E95
T-9	6-A100 or E95
T-900	4-A100 or E95
691	1-717, 1-479
T-600	2-A100 or E95
T-45	4-1015, E9 or E91
T-50	4-E640
T-60	2-1015, E9 or E91
T-61	2-1015, E9 or E91
T-65	2-A100 or E95
T-75	2-A100 or E95
T-77	2-1015, E9 or E91
T-78	4-A100 or E95
TC-47 (Clock)	4-1015, E9 or E91 1-A100 or E95
TC-57 (Clock)	4-1015, E9 or E91 1-A100 or E95
T-1000 (Clock)	2-A100 or E95 1-A100 or E95
T51-124	4-E640
T-63	2-1015, E9 or E91
T-64	2-1015, E9 or E91
T-702	4-1035 or E93
T-88	2-1015, E9 or E91
T-89	2-1015, E9 or E91
T-804	4-A100 or E95
T-805	2-A100 or E95
T-902	4-A100 or E95
T-905	6-1035 or E93
T-907	6-1035 or E93
T-67	1-216
T-68	1-216
T-69	1-216
T-84	4-1015, E9 or E91
T-90	4-1015, E9 or E91
T-703	4-1035 or E93
T-902	4-A100 or E95
T-906 (AM-FM)	4-1015, E9 or E91
T-908	6-1035 or E93
T-909	6-1035 or E93
T-911	6-A100 or E95
PHONO-TRIX	
4334	4-A100 or E95
TM-2R	6-1015, E9 or E91
G	4-A100 or E95
88	7-1035 or E93, 3-1015, E9 or E91
PLATA	
6T-1	4-1015, E9 or E91
6TR-100	1-216
7TS-190	6-1015, E9 or E91
7TR-200H	6-A100 or E95
8TS-365	6-1015, E9 or E91
9TA-370	4-1035 or E93
10TF-530	4-1015, E9 or E91
11TF-520	4-1035 or E93
11TF-500	6-A100 or E95
7TL-380	2-1015, E9 or E91
10TL-540	4-1015, E9 or E91
12TF-550	6-1035 or E93
PONTIAC (Delco)	
988837	4-E9N
988978	4-E9N

(1035 formerly 635)

BATTERY REPLACEMENT GUIDE (cont.)

MAKE & MODEL	"EVEREADY" BATTERIES
RAYTHEON	
8TP1	4-A100 or E95
8TP2	4-A100 or E95
8TP3	4-A100 or E95
8TRARN	4-A100 or E95
ST1	4-A100 or E95
ST2	4-A100 or E95
ST3	4-A100 or E95
ST4	4-A100 or E95
8TP4	4-A100 or E95
6RT1	1-246
T2500	1-274 or 4-A100 or E95
T100	1-246
T150	1-246
T500	1-A100 or E95
RCA	
6B4B	1-A100 or E95, 1-467
6B4	1-A100 or E95, 1-467
6B5	1-A100 or E95, 1-467
6BX5	2-A100 or E95, 1-477
6BX6	2-A100 or E95, 1-477
6BX8	1-755
6BX41	2-A100 or E95, 1-477
6BX63	1-756
6BY4A (Radio)	1-729
6BY4A (Phono)	4-A100
7BT9	1-226
7BT10	1-2506
7BX5	1-A100 or E95, 1-477
7BX6	1-717, 1-479
7BX7	1-717, 1-479
7BX8	1-756
7BX9	1-756
7BX10	1-752
8BT7	1-226
8BT8	1-226
8BT9	1-226
8BT10K	1-2506
9BT9	1-226
9BX2	1-2731
9BX5	1-2731
1MBT6	9-A100 or E95
1BT2	4-1015, E9 or E91
1BT3	4-1015, E9 or E91
1BT4	3-1035 or E93
1BT5	3-A100 or E95
1BX5	1-717, 1-479
1BX6	1-717, 1-479
1BX7	1-717, 1-479
1T4	4-1015, E9 or E91
1T5	4-1035 or E93
T1	3-1035 or E93
T2	3-1035 or E93
PT1	3-1035 or E93
TC1	3-1035 or E93
(Clock)	1-N26
TX1	3-1035 or E93
1TP1	1-E133, 523 or 333
1TP2	1-E133, 523 or 333
1T4E	4-1015, E9 or E91
1T4H	4-1015, E9 or E91
1T4J	4-1015, E9 or E91
1T5J	4-1035 or E93
1T5L	4-1035 or E93
1TEH	3-1035 or E93
T2J	3-1035 or E93
T2K	3-1035 or E93
1RH1	1-E133, 523 or 333
1RJ19	1-E133, 523 or 333
1RG1	3-1035 or E93
1RG3	4-1015, E9 or E91
1RG4	4-1015, E9 or E91
1RG11	3-1035 or E93
1RG14	3-1035 or E93
1RG15	3-1035 or E93
1RG31	4-1015, E9 or E91
1RG33	4-1015, E9 or E91
1RG34	4-1015, E9 or E91
1RG41	4-1015, E9 or E91
1RG43	4-1015, E9 or E91
1RG46	4-1015, E9 or E91
3RG1	4-1015, E9 or E91
3RG3	4-1015, E9 or E91
3RG6	4-1015, E9 or E91
3RH2	1-333, 523 or E133
3RH3	1-333, 523 or E133
3RG8	4-1035 or E93
3RH10	1-333, 523 or E133
3RG14	4-1015, E9 or E91

MAKE & MODEL	"EVEREADY" BATTERIES
RCA (Cont.)	
3RG31	4-1015, E9 or E91
3RG32	4-1015, E9 or E91
3RG33	4-1015, E9 or E91
3RG34	4-1015, E9 or E91
3RG61	4-1015, E9 or E91
3RG64	4-1015, E9 or E91
3RG81	6-1035 or E93
4RG1	4-1015, E9 or E91
4RG2	4-1015, E9 or E91
4RG3	4-1015, E9 or E91
4RG5	4-1015, E9 or E91
4RG6	4-1015, E9 or E91
4RG11	4-1015, E9 or E91
4RG12	4-1015, E9 or E91
4RG16	4-1015, E9 or E91
4RG31	4-1015, E9 or E91
4RG34	4-1015, E9 or E91
4RH1	1-333, 523 or E133
4RM4	6-1035 or E93
REALISTIC	
—	1-216
90L695	1-226
90LX661	1-226
90LX665	1-206
TR730	8-1015, E9 or E91
90L611	1-226
REALTONE	
TR555	1-216
TR561	1-216
TR666	1-216
TR801	1-216
TR802	2-1015, E9 or E91
TR803	1-E177
TR804	1-E164
TR805	1-216
TR806	6-1015, E9 or E91
TR810	1-216
TR861	1-216
TR870	1-216
TR970	4-1015, E9 or E91
TR1030	4-1035 or E93
TR1088	1-216
TR1089	1-216
TR1618	3-1015, E9 or E91
TR1623	3-1015, E9 or E91
TR1628	1-216
TR1642	1-216
TR1645	1-216
TR1819	6-1015, E9 or E91
TR1820	1-216
TR1826	1-216
TR1827	5-1015, E9 or E91
TR1843	1-216
TR1844	4-1015, E9 or E91
TR1929	4-1015, E9 or E91
TR2001	4-1035 or E93
TR2021	4-1035 or E93
TR2925	6-1015, E9 or E91
TR3422	4-1035 or E93
TR3916	4-1035 or E93
TR4016	4-1035 or E93
REGAL	
BP-48	1-A100 or E95, 1-467
1878	1-746, 1-467
P-175	2-746, 2-482
REGENCY (I.D.E.A.)	
TR-1	1-412
TR-4	1-216
TR-5	1-246
TR-6	1-2356
TR-7	3-1015, E9 or E91
TR-8	1-246
TRC-5A	1-243
TR-5B	1-243
TR-5C	1-243
TR-8A	1-243
XR-2	3-912
XR-2A	2-912
TR-11	3-1015, E9 or E91
TR-22	3-A100 or E95
TR-99	3-1015, E9 or E91
RP-3 (Record-Player)	4-A100 or E95
RP-4 (Radio-Phono)	4-A100 or E95

MAKE & MODEL	"EVEREADY" BATTERIES
REVERE	
400	1-717, 1-467
RIMENCO	
420A	1-A100 or E95, 1-457
415A	1-A100 or E95, 1-457
ROBIN	
TR-605	1-216
ROCKLAND	
88-1-S (Radio-Phono)	4-A100 or E95
ROLAND	
4P2	2-1035 or E93, 1-477
5P5	1-717, 1-477
TR4	1-216
6TR	6-1015, E9 or E91
4PL	2-1035 or E93, 1-477
4TR	1-226
5PL	1-717, 1-477
5P5-1	1-717, 1-477
5P54-1	1-717, 1-477
71-384 (W100)	1-756
61-482 (5TR)	6-1015, E9 or E91
71-483 (TW6)	6-1015, E9 or E91
71-484 (6TR-2)	6-1015, E9 or E91
71-485 (7TL)	6-A100 or E95
71-486 (7TW)	6-A100 or E95
71-288 (TC10)	4-1015, E9 or E91
(Clock)	1-1015, E9 or E91
51-481 (TW4)	6-1015, E9 or E91
TR5	6-1015, E9 or E91
TR7	6-1015, E9 or E91
TR8	6-1015, E9 or E91
TR9	4-1035 or E93
TC11	5-1015, E9 or E91
SAMPSON	
SC4000	4-904, E90 or E401
S640	1-216
BT65	1-216
BT85	1-216
SANYO	
5C-01	4-1035 or E93
6C-1	4-1015, E9 or E91
6C-3	4-1015, E9 or E91
6C-5	1-216
6C-9	4-1015, E9 or E91
6C-11	4-1015, E9 or E91
6C-15	1-216
6C-28	4-1015, E9 or E91
6C-022	1-216
6S-08	4-1035 or E93
7C-16	2-1015, E9 or E91
7S-23	4-1015, E9 or E91
8S-P2	4-1015, E9 or E91
8S-P3	4-1015, E9 or E91
9S-P2	4-1015, E9 or E91
6L-P4N	4-1015, E9 or E91
10S-P10	4-1035 or E93
AFT-2	4-1035 or E93
6S-T27	4-A100 or E95
8S-P14	4-1015, E9 or E91
8S-P15	4-1015, E9 or E91
118S-P18	4-1015, E9 or E91
SEMINOLE	
600	1-E133, 523 or 333
601	1-216
800	1-216
801	1-216
900	4-1015, E9 or E91
1000	4-1035 or E93
1001	4-1015, E9 or E91
1100	6-1015, E9 or E91
1101	4-1015, E9 or E91
SHARP	
TR-182	1-216
TR-202	1-216

MAKE & MODEL	"EVEREADY" BATTERIES
SHARP (Cont.)	
TR-203	6-1015, E9 or E91
TR-208	1-216
TR-210	1-216
TR-232	1-216
BX-330	4-1015, E9 or E91
BX-325	1-216
BX-326	4-1035 or E93
BX-327	4-1015, E9 or E91
BP-318	4-1015, E9 or E91
BXL-372	3-1015, E9 or E91
BP-410	4-1015, E9 or E91
BX-371	4-1015, E9 or E91
TR-237	4-1015, E9 or E91
BX-381	3-1015, E9 or E91
BX-390	4-1035 or E93
BXC-380	4-1035 or E93
BZ-490	4-1015, E9 or E91
BX-403	4-1035 or E93
FX-401	6-1015, E9 or E91
LY-412	4-1035 or E93
FYL-411	4-1035 or E93
BZ-480	4-A100 or E95
FX-404	4-1035 or E93
BXG-370	4-1035 or E93
ULT-131	4-A100 or E95
UKT-70	4-A100 or E95
UWT-121	4-A100 or E95
BH-354	4-A100 or E95
BH-353	4-A100 or E95
BH-602	6-A100 or E95
TRP-601 (TV)	1-561
TRP-804 (TV)	1-561
BP-374	2-1015, E9 or E91
BP-460	1-216
BP-485	6-1015, E9 or E91
FXG-700	4-A100 or E95
FW-503	4-A100 or E95
FX-495	4-1035 or E93
FX-505	4-1035 or E93
FX-506	4-1035 or E93
FX-514	4-1035 or E93
SILVERTONE (Sears)	
15	6-A100 or E95
16	6-A100 or E95
17	6-A100 or E95
18	6-A100 or E95
19	6-A100 or E95
20	6-A100 or E95
21	6-A100 or E95
22	6-A100 or E95
47	4-1015, E9 or E91
(Clock)	1-1035 or E93
202	6-1035 or E93
206	1-216
208	3-1035 or E93
209	3-1035 or E93
210	3-1035 or E93
211	1-226
212	1-226
213	1-226
214	4-1015, E9 or E91
217	6-1035 or E93
220	6-A100 or E95
222	8-1035 or E93
225	1-754
57E0210	2-A100 or E95, 1-467
57E0220	1-753
57E0215	2-A100 or E95, 1-467
1013-1019	6-A100 or E95
1044	4-1035 or E93
1045	4-1035 or E93
1046	4-1035 or E93
1201	1-226
1202	1-216
1203	1-216
1208	4-1015, E9 or E91
1209	4-1015, E9 or E91
1215	6-1035 or E93
1216	6-1035 or E93
1217	6-A100 or E95
2225	1-753
2200	1-753
2202	1-753
2203	1-753
3210	2-964, 1-477
2215	2-964, 1-477
2217	2-964, 1-477
2218	2-964, 1-477
2210	2-A100 or E95, 1-467
3200	1-756
3202	1-756

BATTERY REPLACEMENT GUIDE (cont.)

MAKE & MODEL	"EVEREADY" BATTERIES
SILVERTONE (Cont.)	
3203	1-756
3217	2-964, 1-477
4225	1-753
4210	2-964. 1-477
4212	1-1035 or E93, 1-415
5227	1-753
6217	2-964, 1-477
6218	2-964, 1-477
7222	1-753
7224	1-753
7224C	1-753
7226	1-753, 1-A100 or E95
7228	1-2506
8168	1-744, 2-482
8204	1-226
8206	1-226
8208	1-226
8210	1-964, 1-477
8211	1-964, 1-477
8212	1-964, 1-477
8214	2-964, 1-477
8215	2-964, 1-477
8217	2-964, 1-477
8218	2-964, 1-477
8219	2-964, 1-477
8220	1-276
8222	1-753
8224	1-753
8226	1-753, 1-A100 or E95
8228	1-2506
8229	1-2506
9014	6-A100 or E95
9015	6-A100 or E95
9016	6-A100 or E95
9202	1-226
9203	1-226
9204	1-226
9205	1-226
9206	1-226
9214	1-717, 1-477
9215	1-717, 1-477
9216	1-717, 1-479
9218	1-717, 1-479
9222	1-2506
9226	8-A100 or E95
9270	1-754
9280	1-754
2166 (Remote TV Transmitter)	1-E163
2200	1-216
2201	1-216
2202	1-216
2204	1-216
2204	1-216
2205	1-206
2206	1-206
2207	1-206
2208	4-1015, E9 or E91
2209	4-1015, E9 or E91
2212	6-1015, E9 or E91
2213	6-1015, E9 or E91
2214	4-1015, E9 or E91
2218	6-1035 or E93
2222	6-A100 or E95
2223	6-A100 or E95
2224	8-1035 or E93
2226	8-1035 or E93
2201	1-216
2215	6-1035 or E93
2216	6-1035 or E93
3115	1-E163
3211	4-1015, E9 or E91
3212	4-1015, E9 or E91
3219	6-1035 or E93
3220	6-1035 or E93
3228	8-1035 or E93
4211	4-1015, E9 or E91
4212	4-1015, E9 or E91
4219	6-1035 or E93
4220	6-1035 or E93
SINGER	
GP-125X (TV)	1-564
SONARCOM	
CBP	2-2713
SONIC	
TR-4	1-226
TR-6	1-276

MAKE & MODEL	"EVEREADY" BATTERIES
SONIC (Cont.)	
TR-500	1-266
TR-600	1-276
TR-700	1-276
TR-66	1-266
TR-88	1-276
TR-99	1-246
SONORA	
538	2-A100 or E95, 1-477
537	2-A100 or E95, 1-477
600	1-964, 1-437
601	1-964, 1-437
602	1-964, 1-437
603	1-964, 1-437
604	1-753
607	2-A100 or E95, 1-477
608	2-A100 or E95, 1-477
610	1-239
658	1-964, 1-437
659	1-964, 1-437
660	1-964, 1-437
661	1-964, 1-437
SONY	
KTF-1	4-1035 or E93
TR-6	3-1035 or E93
TR-63	1-216
TR-64	3-A100 or E95
TR-65	1-216
TR-66	3-1035 or E93
TR-69	1-216
TR-72	3-A100 or E95
TR-74	4-A100 or E95
TR-75	3-1035 or E93
TR-77	3-1035 or E93
TR-78	3-A100 or E95
TR-81A	6-A100 or E95
TR-83	3-1035 or E93
TR-84	3-1035 or E93
TR-86	1-216
TR-88	3-1035 or E93
TR-510	1-216
TR-608	3-1035 or E93
TR-609	4-1015, E9 or E91
TR-610	1-216
TRW-621	1-216
TR-624	4-1015, E9 or E91
TR-630	1-216
TR-650	1-216
TR-710	2-1035 or E93
TR-711	4-A100 or E95
TR-712	3-A100 or E95
TR-712 B & Y	4-A100 or E95
TR-714	1-216
TR-716 B & Y	2-1035 or E93
TR-717 B & Y	4-A100 or E95
TR-725	1-216
TR-727	4-A100 or E95
TR-730	1-333, 523 or E133
TR-733	4-1015, E9 or E91
TR-751	6-1035 or E93
TR-810	1-216
TR-812	4-A100 or E95
TR-813	3-1035 or E93
TR-814	4-A100 or E95
TR-815	3-1035 or E93
TR-816	3-1035 or E93
TR-817	1-216
TR-8181	3-1035 or E93
TR-820A	3-1035 or E93
TR-826	1-216
TR-881	3-1035 or E93
TR-910	4-1035 or E93
TR-911	4-A100 or E95
TFM-95	4-A100 or E95
TFM-121	4-1035 or E93
TFM-122	4-A100 or E95
TV-8-301W	1-561
5-303W	1-564
Micro TV TR-6120	4-A100 or E95
EFM-117	4-1035 or E93
TFM-96	6-1015, E9 or E91
TFM-116	4-A100 or E95
TFM-825	1-216
TFM-951	4-A100 or E95
SPARTON	
CR-729	1-E233
SPICA	
ST-6E	1-216
ST-6H	3-1015, E9 or E91

MAKE & MODEL	"EVEREADY" BATTERIES
SPICA (Cont.)	
ST-600	4-1015, E9 or E91
STANDARD	
SR-D210	1-216
SR-E212A	1-216
SR-F22	1-216
SR-F205	3-1015, E9 or E91
SR-F211	1-216
SR-F300	2-904, E90 or E401
SR-F301	2-1015, E9 or E91
SR-G24	4-1015, E9 or E91
SR-G104	4-1015, E9 or E91
SR-G107L	4-1015, E9 or E91
SR-G107	4-1015, E9 or E91
SR-G200	1-216
SR-G204	4-1015, E9 or E91
SR-H105	4-1015, E9 or E91
SR-H204	4-1015, E9 or E91
SR-H501	3-A100 or E95
SR-H505	3-A100 or E95
SR-Q108	4-1015, E9 or E91
SR-J100F	6-1035 or E93
SR-J110FS	4-1015, E9 or E91
SR-Q110FS	4-1015, E9 or E91
SR-A820	4-1015, E9 or E91
SR-C430	1-E640
SR-F400	1-216
SR-F410	6-A100 or E95
SR-F910	6-A100 or E95
Uni-Talkie 10	6-1015, E9 or E91
SR-G430 Micronic Ruby	2-E640
SR-H437 Micronic Ruby	2-E640
SR-N512	4-A100 or E95
SR-J610F	4-A100 or E95
SR-J715F	4-1015, E9 or E91
SR-J716F	4-1015, E9 or E91
SR-H730S	3-1015, E9 or E91
SR-J800F	4-1035 or E93
SR-J832F	4-1015, E9 or E91
STAR-LITE	
RN-4	1-1035 or E93, 1-415
RN-5	1-1035 or E93, 1-415
RN-6	1-1035 or E93, 1-415
S-100	1-A100 or E95, 1-416
V-2	1-A100 or E95, 1-477
829-M	1-A100 or E95, 1-467
TR-502	1-216
TR-504	1-216
TR-506	1-216
TR-508	1-216
TRN-60	1-E177
TRN-69	1-216
TRN-74	1-E177
TRN-88	1-216
TRN-931	8-1015, E9 or E91
TRT-41	1-216, 2-1035 or E93
RA-11	1-216, 2-1035 or E93
RN-401	6-1015, E9 or E91, 3-1035 or E93
FM-500	4-1035 or E93
RG-1A	6-A100 or E95
WT-222	1-216
G-501	1-216
TR-508	1-216
ST-300	8-1015, E9 or E91
TRN-102	4-1015, E9 or E91
STEWART WARNER	
Portaphone	1-W322
STROMBERG-CARLSON	
BP1	2-964, 1-437
EP2	2-964, 1-437
AWP-8	1-752, 1-A100 or E95 (Dial Light)
STUZZI	
671-B	4-703
SUDFUNK	
AM-FM	4-A100 or E95
K986A	4-A100 or E95
SUPREME	
TR-803	1-E177

MAKE & MODEL	"EVEREADY" BATTERIES
SYLVANIA	
3401	2-A100, 1-479
3201	2-964, 1-477
3102	6-1015, E9 or E91
3202	1-717, 1-437
3302	2-964, 1-477
3303	1-717, 1-437
3304	1-717, 1-437
3203	7-1035 or E93
3204	7-1035 or E93
3205	7-1035 or E93
3305	7-1035 or E93
3406	6-1035 or E93
(Clock)	1-A100 or E95
4P-05	1-216
4P-06	1-216
4P-14	1-2709
5P-10	4-1015, E9 or E91
5P-11	4-1015, E9 or E91
5P-14	1-2709
5P-15	1-2709
5P-16	1-246
6P-08	1-333, 523 or E133
7P-12	4-1015, E9 or E91
7P-13	7-1035 or E93
8P-18	1-2709
28C-28 (TV Remote Control)	1-E146
690-T	1-333, 523 or E133
7K10	1-216
7K11	1-216
TH16	2-216
4P-19	1-216 or 246
6P-09	1-333, 523 or E133
TR-22	1-216
TR-25	1-216
TR-35	6-1035 or E93
TR-40	6-1035 or E93
SYMPHONETTE	
45KA43	2-A100 or E95, 2-415
45KA37	2-A100 or E95, 1-467
SYMPHONIC	
S-62	1-216
S-73	1-216
S-84	1-216
S-93	1-216
SF-400	6-1035 or E93
SF-600	6-1035 or E93
TELEFUNKEN	
Elite	2-742 or 2-A100, or E95 and 2-483 or 2-W359
Bajazzo	1-744, 1-490
Partner	4-1015, E9 or E91
H.F.	2-742 or 2-A100 or E95 and 2-482 or 2-W359
TELEVIAN	
4TR-201	1-216
6TR-202	1-216
TEN	
KT-6	1-216
KT-41	1-216
KT-61	1-216
KT-62	1-216
KT-63	1-216
KT-71	1-216
KT-200	4-1015, E9 or E91
KT-300	4-1015, E9 or E91
TOKAI	
LA-611	1-216
RA-801	1-216
SA-911	4-1015, E9 or E91
FA-951	1-226
FA-1051	4-1035 or E93
G-607	1-E177
TOPTONE	
AR-610	1-216
AR-620	4-1015, E9 or E91
AR-640	1-216
AR-650	1-216
OR-210	1-216
OR-410	1-216

(1035 formerly 635)

BATTERY REPLACEMENT GUIDE (cont.)

MAKE & MODEL	"EVEREADY" BATTERIES
TOSHIBA	
3TP-31J	1-216
3TP-315	2-1015, E9 or E91
5TP-90	1-216
5TR-193	1-216
5TR-194	1-216
6P-10	1-216
6P-15	1-216
6TC-485	4-1015, E9 or E91
6TR-92	4-A100 or E95
6TR-186	4-1015, E9 or E91
6TP-31	3-1015, E9 or E91
6TP-219	1-216
6TP-304	1-216
6TP-309	1-216
6TP-309A	1-216
6TP-314	3-1015, E9 or E91
6TP-314A	3-1015, E9 or E91
6TP-315	1-216
6TP-3525	1-226
6TP-354	3-904, E90 or E401
6TP-357	3-904, E90 or E401
6TP-385	1-216
6TP-394	3-904, E90 or E401
7TH-425	4-A100 or E95
7TH-513	4-A100 or E95
7TM-285S	1-226
7TM-312S	4-1015, E9 or E91
7TM-352S	4-1015, E9 or E91
7TP-21	2-1015, E9 or E91
7TP-303	3-1015, E9 or E91
7TP-352M	1-226
7TP-352S	1-226
7TM-513A	4-A100 or E95
8TM-41	4-1015, E9 or E91
8TM-294	4-1015, E9 or E91
8TM-294B	4-1015, E9 or E91
8TM-300S	3-1035 or E93
8TM-300SB	6-1015, E9 or E91
8L-420R	4-1035 or E93
8TP-90	1-216
8TP-294	4-1015, E9 or E91
9TL-365S	4-1035 or E93
9TM-4	4-1015, E9 or E91
9TM-40	4-1015, E9 or E91
10TL-409	4-A100 or E95
6TP-515	1-216
TRANCEL	
T-7	1-216
T-11	1-216
TR-81	1-216
TRANS-AMERICAN	
SR-6T60	1-216
TRANS-ETTE	
TRN-346B	1-216
YRM6	1-216
103	2-1015, E9 or E91
109	4-1015, E9 or E91
129	4-1035 or E93
409	4-1035 or E93
TRN-701	2-1015, E9 or E91
AF-105	6-1035 or E93
TRAV-LER	
6300	2-964, 1-477
6305	2-964, 2-455
D-3604A	2-964, 2-455
TP-500	4-A100 or E95
TR-250-A	1-239
TR-251-A	1-239
TR-280 Series	1-226
TR-600	1-216
TR-610	1-216
TR-620	4-1015, E9 or E91
TR-625	4-1015, E9 or E91
TR-630	4-1015, E9 or E91
TRUETONE (Western Auto)	
D-3809	3-A100 or E95, 1-467
D-3811	4-A100 or E95, 1-467
D-3722	1-753
D-3840	1-753
D-3910	5-A100 or E95, 1-467
D-3912	5-A110 or E95, 1-467
D-3503A	2-964, 2-455
D-3504A	2-964, 2-455
D-3603A	2-964, 2-455
D-3614A	1-216

MAKE & MODEL	"EVEREADY" BATTERIES
TRUETONE (Cont.)	
D-3600A	2-964, 1-477
D-3716A	4-A100 or E95
D-3784A	1-717, 1-477
D-3789A	1-756
D-3870A	1-964, 1-477
D-3780A	1-964, 1-477
D-3785A	1-717, 1-477
D-3715A	1-246
DC-3800	1-717, 1-477
DC-3884	6-1035 or E93
DC-3886A	6-1035 or E93
DC-3050	6-1015, E9 or E91
DC-3052	1-216
DC-3084	6-1035 or E93
DC-3085	6-1035 or E93
DC-3088	6-1035 or E93
DC-3090	1-216
DC-3091	1-226
DC-3092	1-226
DC-3164	1-E133, 523 or 333
DC-3166	1-E133, 523 or 333
DC-3103	1-216
DC-3105	1-216
DC-3156	1-216
DC-3160	1-216
DC-3270	4-1015, E9 or E91
DC-3280	3-1015, E9 or E91
2DC-1278A	1-E163
2DC-3248	1-E163
DC-3164	1-E163
DC-3316	1-216
VICTOR	
TA-2750	1-226
TR-650	1-226
VISCOUNT	
102	1-216
103	1-216
302	1-216
602	1-216
605	1-216
613	1-216
616	1-216
6TP-102	1-216
802	1-216
805	6-1035 or E93
818	1-216
831	1-216
833	4-1035 or E93
835	4-1035 or E93
840	4-1035 or E93
1020	1-216
1030	4-1015, E9 or E91
1130	4-1035 or E93
VISTA	
NTR150	1-216
TR806	1-216
NTR800	1-216
G950	6-1015, E9 or E91
NTR8H	6-A100 or E95
SPZ	6-A100 or E95
VOCALINE	
Commaire PT-27	2-560
VOICASTER	
—	2761
WALES	
B-46	1-1035 or E93, 1-416
—	1-A100 or E95, 1-457
P	1-216
9	1-216
WARWICK	
162	5-A100 or E95, 1-467
2212	3-1035 or E93
2215	6-1035 or E93
2218	6-1035 or E93
2222	6-A100 or E95
2224	8-1035 or E93
2226	8-1035 or E93
WATTERSON	
601	8-A100 or E95

MAKE & MODEL	"EVEREADY" BATTERIES
WEBCOR	
311	1-2761
312	4-1015, E9 or E91
4-302	1-216
R-305	1-216
G-308	1-216
G-309	4-1015, E9 or E91
306	1-216
307	1-216
310	1-226
350	1-216
2104	1-216, 6-1015, E9 or E91
2204	1-216, 6-1015, E9 or E91
4210	1-2761
316	6-A100 or E95
WESTCLOX	
80000 Series	1-216
WESTINGHOUSE	
H490P4	1-1035 or E93, 1-415
H491P4	1-1035 or E93, 1-415
H492P4	1-1035 or E93, 1-415
H493P4	1-1035 or E93, 1-415
H494P4	2-964, 1-477
H495P4	2-964, 1-477
H496P4	2-964, 1-477
H504P4	1-964, 1-477
H505P4	1-964, 1-477
H506P4	1-964, 1-477
H507P4	1-964, 1-477
H508P4	1-1035 or E93, 1-415
H511P4	1-964, 1-477
H512P4	1-964, 1-477
H556P4	1-A100 or E95, 1-477
H557P4	1-964, 1-477
H558P4	1-964, 1-477
H559P4	1-964, 1-477
H561P4	1-A100 or E95, 1-477
H562P4	1-A100 or E95, 1-477
H563P4	1-A100 or E95, 1-477
H564P4	1-A100 or E95, 1-477
H565P4	1-A100 or E95, 1-477
H587P7	1-226
H588P7	1-226
H589P7	1-226
H598P4	1-964, 1-477
H599P4	1-964, 1-477
H602P7	1-276
H610P5	1-226
H611P5	1-226
H612P5	1-226
H617P7	1-226
H618P7	1-226
H619P7	1-226
H621P6	1-2761 or 6-A100 or E95
H622P6	1-2761 or 6-A100 or E95
H651P6	1-226
H652P6	1-226
H653P6	1-226
H655P5	4-1015, E9 or E91
H656P5	4-1015, E9 or E91
H659P4	1-276, 1-479
H660P4	1-276, 1-479
H662P4	1-276, 1-479
H663P4	1-276, 1-479
H664P4	1-276, 1-479
H665P5	1-276, 1-479
H667P5	1-276, 1-479
H685P8 (Clock)	4-1015, E9 or E91 1-A100 or E95
H686P8 (Clock)	4-1015, E9 or E91 1-A100 or E95
H687P8 (Clock)	4-1015, E9 or E91 1-A100 or E95
H690P5	4-1035 or E93
H693P8	1-226
H694P8	1-226
H695P8	1-226
H697P7	4-1015, E9 or E91
H698P7	4-1015, E9 or E91
H699P7	4-1015, E9 or E91
H712P9	6-A100 or E95
H713P9	6-A100 or E95
H725P6	4-1035 or E93
H726P6	4-1035 or E93
H727P6	4-1035 or E93
H728P6	4-1035 or E93

MAKE & MODEL	"EVEREADY" BATTERIES
WESTINGHOUSE (Cont.)	
H729P7	4-A100 or E95
H730P7	4-A100 or E95
H732P7	2-1015, E9 or E91
H733P7	2-1015, E9 or E91
H737P7	4-1035 or E93
H738P7	4-1035 or E93
H751P4	1-276, 1-479
H752P4	1-276, 1-479
H769P7	4-A100 or E95
H770P7	4-A100 or E95
H771P6	4-1035 or E93
H772P6	4-1035 or E93
H773P6	4-1035 or E93
H793P6	4-1035 or E93
H790P6	4-1015, E9 or E91
H791P6	4-1015, E9 or E91
751-P4	1-717, 1-479
752-P4	1-717, 1-479
HK-4410 (TV Remote Control)	1-E165
H793P6	6-1035 or E93
H795P6	2-1015, E9 or E91
H796P6	2-1015, E9 or E91
H798P7	2-1015, E9 or E91
H799P7	2-1015, E9 or E91
H812P8	4-1035 or E93
H814P7	4-1035 or E93
H815P7	4-1035 or E93
H841P6	2-1015, E9 or E91
H842P6	2-1015, E9 or E91
H846P8	4-1015, E9 or E91
H847P8	4-1015, E9 or E91
H866P8	4-1035 or E93
H868P12	6-1035 or E93
H869TC9	8-1015, E9 or E91
H870TCR9	8-1015, E9 or E91
H885P7	4-A100 or E95
H890P6	4-1015, E9 or E91
H892P8GP	4-1015, E9 or E91
H893P8GP	4-1015, E9 or E91
H896P6	4-1035 or E93
H898P8	4-1035 or E93
H899P8	4-1035 or E93
H901P7	2-1015, E9 or E91
H903P8GP	2-1015, E9 or E91
H904P8	2-1015, E9 or E91
H909PN9GP	4-1015, E9 or E91
H909PN9	4-1015, E9 or E91
WILCO	
ST-7	4-1015, E9 or E91
ST-555	1-216
ST-6	4-A100 or E95
360	2-1015, E9 or E91
ST-88	4-1015, E9 or E91
WINDSOR	
7 Trans.	1-216
YAECON	
YTR-58	1-216
YTR-601	1-216
YTR-602	1-216
YSB-602	6-A100 or E95
YTR-777	3-1015, E9 or E91
YTR-824	6-A100 or E95
YTR-836	6-A100 or E95
YTR-921	3-1035 or E93
YAOU	
6GA-605	1-216
7GA-504	3-1015, E9 or E91
909	1-E177
YASHICA	
YT-100	1-216
YT-300	4-1015, E9 or E91
YP-500	6-A100 or E95
YR-665	1-216
AR-665	1-216
YORK	
TR-100	4-1035 or E93
TR-111	4-A100 or E95
YUKO	
AK-100	1-226
AK-150	1-216
AK-400	1-226
AK-600	4-1015, E9 or E91

(1035 formerly 635)

BATTERY REPLACEMENT GUIDE (cont.)

MAKE & MODEL	"EVEREADY" BATTERIES
YUKO (Cont.)	
AK-620	1-E177
AK-650	1-216
AKT-410	6-1015, E9 or E91
ZENITH	
T402	2-964, 1-467
T404	1-785
T405	1-785
T400L	1-717, 1-479
Z402L	1-717, 1-479
Z404	1-717, 1-479
X500	4-1015, E9 or E91
Y506L	1-726, 1-479
A400	1-707, 1-495
A402	1-707, 1-495
A404	1-707, 1-495
A504	1-276, 1-495 and 1-1015
Y600	1-752W

MAKE & MODEL	"EVEREADY" BATTERIES
ZENITH (Cont.)	
A600	1-752W
B400	1-707, 1-495
Royal 90	2-1015, E9 or E91
Royal 100	3-1015, E9 or E91
Royal 125	2-1015, E9 or E91
Royal 200	4-1015, E9 or E91
Royal 250	4-1015, E9 or E91
Royal 275	4-1015, E9 or E91
Royal 300	4-1015, E9 or E91
Royal 400	4-1015, E9 or E91
Royal 450	6-1015, E9 or E91
Royal 475	6-1015, E9 or E91
Royal 500	4-1015, E9 or E91
Royal 675	4-1035 or E93
Royal 700	6-1035 or E93
Royal 710	6-1035 or E93
Royal 750	6-1035 or E93
Royal 755	6-1035 or E93
Royal 760	6-1035 or E93

MAKE & MODEL	"EVEREADY" BATTERIES
ZENITH (Cont.)	
Royal 780	6-1035 or E93
Royal 790	6-1035 or E93
Royal 800	8-1035 or E93
Royal 850	4-1015, E9 or E91
(Clock)	1-A100 or E95
Royal 900	8-1035 or E93
Royal 950	4-1015, E9 or E91
(Clock)	1-A100 or E95
Royal 1000	8-A100 or E95
(Dial Light)	1-A100
Royal 2000	8-1035 or E93
B600	1-752W
R-50	2-1015, E9 or E91
R-55	2-1015, E9 or E91
R-150	3-1015, E9 or E91
R-150C	3-1015, E9 or E91
R-150F	3-1015, E9 or E91
R-150L	3-1015, E9 or E91
R-150W	3-1015, E9 or E91

MAKE & MODEL	"EVEREADY" BATTERIES
ZEPHYR	
77	6-1035 or E93
231	1-216
500	1-216
620	1-216
630	1-216
651	4-A100 or E95
670	1-216
671	1-216
711	1-216
712	1-216
721	1-216
722	1-216
730	1-216
740	1-216
741	1-216
811	1-216
812	1-216
911	1-216
930	1-216

(1035 formerly 635)

IV. COMPARATIVE STOCK NUMBERS

"Eveready" Battery No.	Voltage	NEDA Number	"Bright Star"	"Burgess"	"Mallory"	"Marathon"	"Philco"	"RCA"	"Ray-O-Vac"	"Sears"	"Ward"	"Wizard"	"Zenith"	*** Military
E1	1.40	1100		Hg-1	RM-1			VS143						
E1N	1.35			Hg-1R	RM-1R									BA-1312/U
E3	1.35			Hg-3R	RM-3R									BA-1330/U
E4	1.35			Hg-4R	RM-4R									BA-1228/U
EPX-4	5.40				PX-4									
6 "Gray Label"	1.5	906	6 Tel.	6 Tel.	M-906	6T	*6 Tel.	VS006C	6 Tel. C					
6 "Ignitor"	1.5	905 or 914	6 Ign.	6 Ign.	M-905	66	*6	VS006S	6 Ign. S	*4701 or 4669	6MW	7D7905		
6 RR & Ind.	1.5	911	6 Ind.	6 Ind.	M-911	66R			6RR&Ind.					BA-23
EPX-6	5.40, 12.15				PX-6									
E9	1.40	1103		Hg-9	ZM-9		*P9	VS313	15M	6448	122	7D9015	Z9	
E9N	1.40				DM-9N									
E12	1.40	1101		Hg-12	RM-12			VS144						
E12N	1.35			Hg-12R	RM-12R									BA-1328/U
EPX-13	1.35				PX-13									
EPX-14	2.7				PX-14									
N22	1.25			CD1										
N24	1.25			CD2										
N26	1.25			CD8										
N26T	1.25			CD8L										
N28	1.25			CD3										
N28T	1.25			CD3L										
N32	1.25			CD4										
N32T	1.25			CD4L										
N33	1.25													
N33T	1.25													
N36	1.25			CD5										
N36T	1.25			CD5L										
N38	1.25													
N38T	1.25													
N39	1.25													
N40	1.25													
N40T	1.25													
N41	1.25													
N41T	1.25													
S41	1.50													
E42	1.40				RM-42									
E42N	1.35			Hg-42R	RM-42R									BA-1030/U
N43	1.25													
N43T	1.25													
N45	1.25			CD6L										
N46	1.25			CD6										

COMPARATIVE STOCK NUMBERS (cont.)

"Eveready" Battery No.	Voltage	NEDA Number	"Bright Star"	"Burgess"	"Mallory"	"Marathon"	"Philco"	"RCA"	"Ray-O-Vac"	"Sears"	"Ward"	"Wizard"	"Zenith"	*** Military
N52	1.25			CD9										
N53	1.25			CD12										
N54	1.25													
N55	1.25													
N56	1.25			CD7										
N57	1.25			CD10L										
N58	1.25													
N59	1.25													
N66	6			CD22										
N67	6			CD30										
N70	6			CD31										
N73	1.25			CD101										
N74	1.25			CD102										
N75	1.25			CD104										
N76	1.25			CD105										
S76	1.50													
N77	1.25			CD107										
N78	1.25													
N79	1.25			CD108										
N81	1.25			CD109										
N82	1.25													
N83	1.25			CD110										
N85	1.25			CD111										
E90	1.5	910		AL-N	Mn-9100		*P9100	VS1073					ZM9100	
E91	1.5	15	7524	AL-9	Mn-1500		*P1500	VS1334	815	4666	91MW			
E92	1.5	824		AL-7	Mn-2400									
E93	1.5	14	7522	AL-1	Mn-1400		*P1400	VS1335		4665	93MW			
E94	1.5	927												
E95	1.5	13	7520	AL-2	Mn-1300	122		VS1335			95MW			
E97S	1.5													
D99	1.5	813							5LP	4662	1MW			
A100	1.5	13	0197	230	M-13R	123	*P920	VS336	13	6445	13MW	7D9013	Z4NL	
E113	4.05			H113R	TR-113R									
E114	5.40			H114R	TR-114R									
E115	7.0				TR-115									
E115N	6.75			H115R	TR-115R									
E126	8.4	1611		H126	TR-126			VS328	1611M			7D9611		
E132	2.80	1200			TR-132				1200M					
E132N	2.70			H132R	TR-132R			VS148						
E133	4.20	1304		H133	TR-133			VS149	1304M			7D9304		
E133N	4.05	1304		H133R	TR-133R									
E134	5.60				TR-134									
E134N	5.40			H134R	TR-134R									
E135	7.00				TR-135									
E135N	6.75			H135R	TR-135R									
E136	8.40				TR-136									
E136N	8.10			H136R	TR-136R									
E137	9.80				TR-137									
E137N	9.45			H137R	TR-137R									
E145	7.00			H145	TR-145									
E146	8.40			H146	TR-146		*P146	VS312	1604M	6416		7D9604	Z146	
E152	2.80				TR-152									
E152N	2.70			H152R	TR-152R									
E153	4.20				TR-153									
E153N	4.05			H153R	TR-153R									
E162	2.70			H162R	TR-162R									
E163	4.20	1305		H163	TR-163			VS163		6415				
E163N	4.05			H163R	TR-163R									
E164	5.60	1404		H164	TR-164			VS164						
E164N	5.40			H164R	TR-164R									
E165	7.00	1500		H165	TR-165			VS165						
E165N	6.75			H165R	TR-165R									
E169	12.6	1901		H169	TR-169									

COMPARATIVE STOCK NUMBERS (cont.)

"Eveready" Battery No.	Voltage	NEDA Number	"Bright Star"	"Burgess"	"Mallory"	"Mara-thon"	"Philco"	"RCA"	"Ray-O-Vac"	"Sears"	"Ward"	"Wizard"	"Zenith"	*** Military
E175	7.00	1501			TR-175									
E177	9.0	1606		H177	TR-177			VS309A	1606					
206	9	1611		L6	M-1611	1611		VS327						
216	9	1604	0920	2U6	M-1604	1604	*P1604	VS323	1604	6417	16MW	7D7604	Z216	
226	9	1600	0918	P6	M-1600	1600A	*P91	VS300A	1600	6418		7D7600	Z226	
228	12.0	1810		PM8	TR-289			VS329	1810M	6425				
E233	4.20	1300		H233	TR-233		*P696	VS400						
E233N	4.05				TR-233R									
E234	5.60			H234	TR-234									
E234N	5.40				TR-234R									
E235N	6.75				TR-235R									
E236N	8.1				TR-236R									
239	9, 13.5	1900		XX9	*M-1900	1900		VS304	1900					
243	4.5	1610		2Z3		1610		VS324						
246	9	1602		2N6	M-1602	1602	*P178	VS305	1602			7D7602		
266	9	1605		M6	M-1605	1605	*P1605	VS322	1605					
274	6	1400		4D4		1400								
276	9	1603		D6	M-1603	1603	*P88	VS306	1603	6419			Z276	
E286	8.4				TR-286									
E289	12.6				TR-289									
E312	1.4			Hg-312	RM-312									
333	4.5	1306		1306	Mn1306		*P1306	VS1149						
W-350	22.5, 45	711		Z30NX		6711		VS114	711					BA-53
W-351	22.5, 45			Z30BP		7405			57R30SS					
W-352	3	701	*260	F2BP		6701		VS100	701					BA-205
W-353	1.5	11		2F		3011		VS141	11					
W-354****	(See 711)													
W-356	3	**		2F2H		6703		VS136	703					
W-357	3	901	863	4F2H		901		VS138	901					BA-225/U
W-358	45			W30BPX		7402								
W-359	45	**	*30-55	A30		4206	*P210	VS014	206	*6460		3B6228		
W-361	103.5	227		XX69		4227			69N					BA-38
W-362	4.5, 7.5			W5BP		7601			7N5S					
W-363F	22.5, 45	**		10308SC		6716		VS127W	A716					
W-363P	22.5, 45	**	*3060-153	10308Pi		6726	*P30F	*VS027	726	*6361		*3B6220		BA-26
W-364F	22.5, 45	**	*30-61	21308SC		6715		VS157W	715					
W-364P	22.5, 45	**		21308Pi		6727	*P30FL		727	*6360				
W-365F	22.5, 45	723		2308SC		6723		*VS126	723					
W-365P	22.5, 45	**	*30-95	2308Pi		6717	*P30D	*VS026	717	*6363				
W-366	1.5-63	407		4GA42		5407	*P41A4FL	*VS053	407			*3B6440		
W-367	7.5-63	408		G5A42		5408	*P87	*VS038	408					
W-368	6-75	**		F4A50		5411			411				*Z6394	
W-369	1.5-90	410		6TA60		5410		*VS054	410					BA-48
W-371	3			2Z2Pi		7901			37R4P					BA-277/U
E400	1.40	1106		Hg-400	RM-400									
E400N	1.35			Hg-400R	RM-400R			VS145						
E401	1.40	1102		Hg-401	RM-401			VS401	R-401					
E401N	1.35			Hg-401R	RM-401R									
409	6	916		F4H Ind.	M-916	490RR			941RR	*4702-4667			Z916	
411	15	208		U10	M-208	4208		VS083	208				Z11M	BA-331/U
412	22.5	215	12P	U15	M-215	4215	*P612	VS084	215	8212			Z12M	BA-261/U
413	30	210		U20	M-210	4210		VS085	A210	8213			Z13M	BA-305/U
415	45	213		U30	M-213	4213	*P150	VS086	213	6485			Z415	
416	67.5	217		UX45	M-217	4217	*P217	VS318	217					
417	15	224		K10		4224								
420	22.5	225		K15		4225								
425P	22.5			XX15		4408			PN15					BA-232/U
430	30	**		K20		4226								
430P	30					4413								
433P	33			XX22		4409			PN22					BA-233/U
437	75	212		XX50	*M-212	4212	*P144	VS217	212				Z437	
E450	1.35			Hg-450R	RM-450R									

COMPARATIVE STOCK NUMBERS (cont.)

"Eveready" Battery No.	Voltage	NEDA Number	"Bright Star"	"Burgess"	"Mallory"	"Mara-thon"	"Philco"	"RCA"	"Ray-O-Vac"	"Sears"	"Ward"	"Wizard"	"Zenith"	*** Military
455	45	**		XX30	*M-201	4201	*P105	VS055	201			7D7201	Z455	BA-56
455P	45			XX30Pi		4410			PN30F	8255			Z30	BA-234/U
457	67.5	203		K45		4203		VS082	203				Z457	BA-314/U
460	45		47P	K30P	PX-18									
467	67.5	200	45N	XX45	M-200	4200	*P67	VS016	200	6480		7D7200	Z67	BA-51
468	67.5	200		V-451				VS125						
477	67.5	211P	675-155	P45	M-211P	4211	*P175 *P149	VS218	211P	6482	62-40	7D7211	Z477	
479	90	214		P60	M-214	4214	*P176	VS219	214	6470			Z90	
482	45	202	30-33	M30	*M-202	4202	*P45	VS013	202	6461		B63241	Z783	BA-59
484	45	207	30-03	B30		4207	*P305	VS012	207	*6462		*3B6239	Z530	BA-223/U
487	22.5, 45		30-95	D30										
489	225		39P	XX150	PF-489	8002			N150					
490	90	204	60N	N60		4204	*P132	VS090	204	*6465		3B6260	Z490	
491	240		24P	U160	PF-491	8003			1010					
492	180, 225			N150	PF-492	8001			1011					
493	300	722		U200		6722		VS093	722					BA-291/U
495	90	**		N60X	*M-216	4216	*P190	VS316					Z495	
497	180, 510		51P-46	U320	PF-497	8004			1012					
E502	1.35			Hg-502R	RM-502R									BA-1058/U
504	15	220	15P	Y10	M-504	4220		VS704	220	8204			Z5M	BA-332/U
505	22.5	221	22P	Y15	M-505	4221		VS705	221	8205			Z6M	BA-304/U BA-333/U
506	30	223		Y20	M-506	4223				8206				BA-334/U
507	30	222		Y20S	M-507	4222								BA-335/U
509	6	908	460	F4H	M-908	490R	*P4F	VS040C	941	4702 or 4607	5MW	7D8908	*Z107G	BA-200/U
510F	6	917		F4SC		496C			941C					
510S	6	**	460S	F4BP	M-915	496S		VS040S	941SC	*4702ST or 4677		7D8915		
515	1.5	**							7R					
520	6	930												
E520	1.40			Hg-520	RM-520									
523	4.5	1306		AL-133	PX-21		*P1306	VS1149						
531	4.5				PX-19									
560	7.5						*P560							
561	15													
563	4.5													
564	13.5													
E601	1.35			Hg-601R	RM-601R									
621	3													
E625	1.40			Hg-625	RM-625									
E625N	1.35			Hg-625R	RM-625R									BA-1006/U
E630	1.40	1104		Hg-630	RM-630		*P630	VS147						
E630N	1.35			Hg-630R	RM-630R									
•635 (See 1035)														
E640	1.40	1105		Hg-640	RM-640		*P640	VS150						
E640N	1.35			Hg-640R	RM-640R									
E675	1.40			Hg-675	RM-675									
702	4.5			B3RT		7702			533					
703	4.5	**	03-17	532		6706		VS133	706					BA-9
704	3			F2RT		7703			921B					BA-204/U
706	6	902		4F4H	*M-902	902		VS103	902					BA-222/U
707	7.5	26		D5	*M-26	3026	*P26	VS315	26				Z707	
708	22.5					7704								
711	1.5	700	*262	2FBP		6700		VS101	700					BA-15A
713	7.5	8		B5		3008		VS129	8					
714	4.5					7607								
715	7.5	903	155	4F5H	M-903	903		VS139	903					
716	9	**	164	4F6H	M-904	904		VS140	904					BA-207/U
717	7.5	9	591	C5	M-9	3009	*P31	VS065	9	6444		7D7009	Z750	
718	6	1	*866	2F4		3001		VS010	A1					BA-203/U
720	1.5	18		2D		3018		VS069	18					
724	6	2		Z4		3002		VS068	A2					

COMPARATIVE STOCK NUMBERS (cont.)

"Eveready" Battery No.	Voltage	NEDA Number	"Bright Star"	"Burgess"	"Mallory"	"Mara-thon"	"Philco"	"RCA"	"Ray-O-Vac"	"Sears"	"Ward"	"Wizard"	"Zenith"	*** Military
726	4.5	19	305	D3		3019		VS072	19				Z450	
727	9-90	428		T6Z60P		5428		VS059	428				Z962	
729	1.5-90	**		4TZ60		5425	*P364	VS064	425					
731	6	918	158	TW1	M-918	896		VS317	918	4705 or 4707	8MW	7D8918		
732	12	926		TW2		926								
735	1.5	900	464	4FH	M-900	491		VS106	900	2259		*3B6770		BA-35
736	4.5	3	360	F3	*M-3	3003	*P38	VS067	A3	*6441		7D7003	Z736	
738	22.5, 45	205	30-59	Z30		4205	*P104	VS015	205					BA-63
740	1.5	719	*20-60	20F		6719	*P816	*VS024	719	*6330		*3B6122		
741	1.5	17	*860	8F		3017			17					
742	1.5	4	462	4F	M-4	3004	*P94	VS004	A4	*6430		*3B6110	Z94	BA-65
743	1.5	5	*660	6F		3005	*P96	*VS007	A5	*6431		*3B6115	Z96	
744	6	**	646	F4Pi	*M-6	3006	*P4F4R	VS009	A6	*6451		*3B6145		BA-210/U
746	4.5	7	361	G3		3007	*P100	*VS002	A7	6440		*3B6135	Z83A	BA-226/U
750	3	**	*50-17	422		6704		VS134	704					BA-208/U
751	4.5	705	*51-17	432		6705		VS142	705					BA-28
752	9-90	400	*66-03	G6B60	*M-400	5400	*P60B6F6	VS047	A400	6401			Z985	
752W	9-90-1.5	**	G6B60-8R			5400 or 3023			23 & A-400				Z985X	
753	7.5, 9-90	401	66-50	F6A60	*M-401	5401	*P841A	VS019	401	6407		*7D7401	Z979	
754	7.5, 9-90	402		G6M60		5402		*VS018	402	*6404		*3B6470		
755	6, 7.5-75	403	66-52	T5Z50		5403	*P350	VS050	403	*6408		3B6464		
756	7.5, 9-90	**	66-53	T6Z60	*M-405	5405	P371	VS057W	405	6409		*7D7405		
757	9-90	406	66-54	F6A60P		5406		VS058	406	*6410		3B6462	Z909	
759	1.5-90	**	61-05	17GD60	*M-413	6424 or 5413	*P60D11L	VS022	413	*6312 or *6308		7D7413	Z802	BA-212/U
761T	1.5, 3, 4.5	712	*71-17S	2370ST		6712		VS130	712	*5005				BA-27
762S	22.5, 45	709	*30-03BP	5308		6709		VS112	709					BA-36
763	22.5	710	*15-50W	4156		6710		VS102	A710					BA-2
766T	16.5 to 22.5	**	*15-90W	2156		6702		*VS137	702					BA-8
771	3, 4.5	**	71-17	2370Pi		6713	*P3D	VS030	718	*6390		*3B6310		
773	1.5 to 7.5	**	51-03	5540		6713	*P5B	VS029	713	6363				BA-34
776	7.5, 9-90	**		S6D60		5415	*P326	VS119	415				Z990	
778	3 to 22.5	**	*15-03W	5156SC		6708		VS131	708					BA-230/U
781	4.5	**	03-17S	5360		6714		VS028	714					BA-31
785	7.5-75	431		T5Z50P		5431		VS060	431				Z775	
789	3					8002			324 Spec.					
799	22.5, 45, 49.5			10338		8005			8333					
812	1.5													
815	1.5		59P	920	M-15P	174		VS-734	710LP					
835	1.5		11P	120	M-14P	114		VS-735	110LP					
850	1.5		10P	220	M-13P	124		VS-736	210LP	210LP				BA-202/UF
904	1.5	910	20	NE N	M-910F	131 or 133		VS073	716				N	
912	1.5	24	58	7	M-24F	180	*K	VS074	400	4656		7D7024	Z912	
915	1.5	**	59	Z	M-15F	170	*P15F	VS034A	7LP	*4653	4MW	7D8015	Z8	BA-58
935	1.5	814	11M	1	M-14F	111	*P900	VS035A	1LP	*4659	3MW	7D8014	Z7	BA-42
950	1.5	813	10M	2	M-13F	121	*P907	VS036	2LP	4650	2MW	7D8013	Z2NL	BA-30
960P	1.5	23		8R		3023		VS070	23				Z1	BA-231/U
964	1.5	20	61R	21R	M-20	3020	*P77	VS236	20	6442		7D8020	Z5	
1015	1.5	15	01-99	930	M-15R	173	*P15R	VS334	15	6447	15MW	7D7015		
1016	1.5			2Z		1950				8116				BA-272/U
•1035 (formerly 635)		14	01-98	130	M-14R	113	*P903	VS335	14	6446				
•1050 (See 1150)														
1052P	1.5			8R	EP-728	7308				8160			Z1	
•1150 (formerly 1050)			10MC	210	M-13X	122			3LP					
E1438N	1.35				RM-1438R									
E1450N	1.35				RM-1450R									
1461	6	907	146	S461	M-907	640 or 640EF	*P64	VS039	641	*4700 or 4668	7MW	7D8907		BA-44 BA-249/U
1462	6					641								

COMPARATIVE STOCK NUMBERS (cont.)

"Eveready" Battery No.	Voltage	NEDA Number	"Bright Star"	"Burgess"	"Mallory"	"Mara-thon"	"Philco"	"RCA"	"Ray-O-Vac"	"Sears"	"Ward"	"Wizard"	"Zenith"	*** Military
1463	12	922	187	2G8H		642			922					
1562	7.5	**	156			651								
1662	9	913	*166			661			661B					BA-206/U BA-236/U
2314	12,21	2400				2400								
2356	9	1612		C6X	M-1612	1952								
2506	3, 6, 9	1601		D6Pi		1601		VS301	1601	6420				
E2550N	1.35				RM-2550R									
2709	9	1613						VS326						
2713	6	1403						VS325						
2731	4.5	1303						VS321						
2744	6	920		F4BW	M-9300	496F			920					
2745	6	924			M-9240				WN-20					
2746	6	925			M-9250									
2761	9	1608		D6S	M-1608	1608			1608					
2762	9	1609				1609								
2780	12	923												

"Eveready" Battery No.	Voltage	"Burgess"	"Mallory"
E302125	7.0	302125-M	302125-M
E302157	1.35	302157	302157
E302158	2, 70, 5.40, 22, 95, 47.25	302158	302158
E302227	4.05	302227	302227
E302229	5.40	302229	302229
E302240	24.3	302240	302240
E302249	6.75	302249	302249
E302250	9.45	302250	302250
E302257	1.35	302257	302257
E302271	1.35-13.5	302271-M	302271-M
E302351	5.40	302351-M	302351-M
E302354	5.40	302354	302354
E302358	10.8	302358	302358
E302360	13.5	302360	302360
E302362	16.2	302362	302362
E302424	6.75	302424	302424
E302425	48.6	302425	302425
E302435	6.75	302435	302435
E302437	9.45	302437	302437
E302462	97.2	302462	302462
E302463	1.35	302463	302463
E302464	6.75	302464	302464
E302465	47.25	302465	302465
E302467	5.40	302467	302467
E302478	9.80	302478-M	302478-M
E302497	6.75	302497	302497
E302499	64.8	302499	302499
E302502	94.5	302502	302502
E302506	4.05-16.2	302506	302506
E302510	1.35	302510	302510
E302519	5.40	302519	302519
E302527	97.2	302527	302527
E302539	21.6	302539	302539
E302540	1.35	302540	302540
E302554	97.2	302554	302554
E302558	35.1, 64.8	302558	302558

"Eveready" Battery No.	Voltage	"Burgess"	"Mallory"
E302579	29.7	302579	302579
E302580	27.0	302580	302580
E302589	21.6	302589	302589
E302642	7.00	302642-M	302642
E302650	1.35	302650	302650
E302651	1.35	302651	302651
E302667	6.75	302667	302667
E302702	2.70	302702	302702
E302795	10.8	302795	302795
E302800	75.6	302800	302800
E302830	1.35-12.15	302830	302830
E302896	1.35-9.45	302896-M	302896
E302904	5.40	302904	302904
E302905	6.75	302905	302905
E302907	9.45	302907	302907
E302908	10.8	302908	302908
E302933	5.60	302933	302933
E302934	97.2, 48.6	302934	302934
E303021	24.30	303021	303021
E303035	8.10	303035	303035
E303053	6.75	303053	303053
E303101	4.05	303101	303101
E303102	2.7, 5.4	303102	303102
E303113	1.35, 2.7, 4.05, 5.4, 6.75, 8.1, 9.45, 10.8	303113	303113
E303177	97.2	303177	303177
E303178	48.6	303178	303178
E303186	16.2	303186	303186
E303198	13.5	303198	303198
E303211	24.3	303211	303211
E303212	12.6	303212	303212
E303219	9.8	303219	303219
E303226	13.5	303226	303226
E303232	6.75	303232	303232
E303243	2.7	303243	303243
E303244	5.4	303244	303244

*Discontinued numbers shown for reference only.

**NEDA number same as an "Eveready" battery number on a different battery. Omitted to prevent errors in shipping.

***Corresponding commercial types may have dimensional and constructional differences from the Military types shown. However, they are usually dimensionally and electrically interchangeable.

****Discontinued number—W354 replaced by 711

•Designates number change only, see 1035 for 635, and 1150 for 1050.

"Eveready", Cat with "Nine Lives", "Mini-Max", "Hot Shot", "Ignitor", "Columbia", "Gray Label", and "Union Carbide"
are registered trade-marks for products of

UNION CARBIDE CORPORATION
CONSUMER PRODUCTS DIVISION
270 Park Avenue, New York, N. Y. 10017

Sales Offices: Atlanta, Chicago, Dallas, Kansas City, Los Angeles, New York, Pittsburgh, San Francisco
IN CANADA: Union Carbide Canada Limited, Toronto

Litho in U. S. A.